



Everything for the Transportation Shop!

1-800-525-8888



## **McGee Company**

Since 1951

1-800-525-8888

**Albuquerque** 

4412 Prospect NE Albuquerque, NM 87110 Dallas

8504 Chancellor Row Dallas, TX 75427

Denver

1140 S. Jason St. Denver, CO 80223 Salt Lake City

1101 S. 700 W. Salt Lake City, UT 84104

Automotive Service Equipment

Tire Service Supplies

Compressed Air Specialists

#### Alignment Equipment

& Tools

Hunter Cemb

Specialty Products

Air Compressors

& Accessories

Quincy Champion

Hankison Becker Wilkerson AirCom

**Balancing Equipment** 

Coats Cemb Hunter

Prevost

Haweka **Battery & Starting** 

Equipment

Schumacher Associate

**Brake Equipment** 

Ammco Hunter Accutrun

**Tire Changing & Handling Equipment** 

> Cemb Coats Branick Ken-Tool Hunter

Diagnostic & **AC Equipment** 

OTC/Bosch/Robinair

CPS RTI Autel

www.McGeeCompany.com

Sizing guides

TPMS charts

Product breakdowns

SDS sheets

Online ordering

#### Air Tools

**RPG** Chicago Pneumatic Ingersoll Rand

Lifting Equipment

Rotary Norco AC Hydraulic AFF **RPG** 

### Lubrication Equipment Additional Products

Graco Banjo Rhino Tank Roth Tank

Superior Storage Tanks

Alpha Balcrank

#### Retreading Equipment

Monarch Vulcan Cincinnati

#### **Retread Supplies**

Jet Pincott B&J Robbins Presti **Tire Chains** 

Laclede **AutoSock** 

Tire Repair

Rema Prema Jet Tech

Valve Hardware

Schrader Dill

#### Wheel Weights

Bada Ascot Perfect Plombco Counteract

#### **Tire Studs & Equipment**

Ugigrip OKU

Calcium Pumps Parts Washers

Tire Mounting Compounds Welding Equipment

**Headlight Aimers** Hose Reels

Spring & Strut Service Equipment

Tire Inspectors & Spreaders

Tire Storage Racks

Impact Sockets

Alignment Shims & Bushing

**Exhaust Hose** Hand Cleaner Wheel Studs & Nuts Reconditioned Equipment














































## McGee Company puts the pieces together for you!

#### The Company

McGee Company is a family owned business that cares about your success. Since 1951, McGee Company has been a leading supplier in the automotive market. Between our four warehouse locations in Denver, Salt Lake City, Dallas, and Albuquerque, we carry the largest inventory of equipment and supplies to serve the tire dealer, automotive service facility, dealership, & retailer. Our broader line also includes lubrication equipment, air compressors and automotive service equipment. Full history of McGee Company available online!

#### Picking Product

It's an art as well as a science! For more than 65 years, McGee Company has carefully researched each product line. Products are tested under severe conditions to guarantee the customer is receiving the best quality. We look for new ideas that work right and make your job easier. Our sales reps are experts to help you select the best product for your needs and manage your inventory to maximize your business.

#### One Supplier

Our broad range of products offer you a single source for all your equipment and supply needs, in turn, saving you time and money.

#### People

Ours make the difference for you! They're friendly and trained to help. The average sales representative has been with the company for ten years. This means they have the knowledge and know how to find the right solution for your needs.

## **Terms and Conditions of Sale**

#### Open account

Open account terms of net 10th prox are available with approved credit. Orders under \$20 are subject to a \$5.00 handling charge.

#### Pricina

Subject to change without notice, but McGee Company strives to get our customers the best value.

#### **Product Warranty**

Manufacturer's warranty applies on all items. Warranty of certain items apply only after inspection by the manufacturer.

#### Sales Tax

McGee Company will bill applicable state and local sales tax on every item unless a sales tax exemption/ resale certification has been provided by the customer.

#### **Credit Cards**

We accept MasterCard and Visa credit cards.

#### **Fast and Easy**

Convenient ordering online, by phone, and by email. McGee Company is open from 8 a.m. to 5 p.m.. Monday through Friday. We maintain the largest inventory of the items listed in our catalog in the Rocky Mountain area.

#### Training

McGee offers numerous seminars on an ongoing basis for customers and staff alike. Denver has an expanded training area that regularly hosts sessions with vendors and industry bodies. Regular seminars include: proper tire repair, alignment training. equipment maintenance, and TPMS systems and best practices. Continued education ensures our reps give the best advice available in the industry.

### **National Support**

We are supported by 34 Ascot warehouses nationally, our membership in Ascot gives you the benefit of buying power, large inventory and diverse product lines.

#### **Lease Programs**

Call us for fast, easy and affordable lease or financing deals on equipment. Tell us about your needs and we will tailor the program to you.

#### Online Presence

www.McGeeCompany.com has a variety of resources to ensure we are your one stop shop! Online customers can order, view their order history, look up invoices, and view lift inspections from previous years. Additionally, there are product breakdowns, SDS sheets, TPMS lookup charts, used equipment specials, and tutorial videos.

#### Freight

All prices are FOB our warehouse unless otherwise specified.

#### Returning Merchandise

Merchandise is eligible for credit or exchange if the following conditions are fulfilled:

- Authority for return has been received.
- Shipping instructions have been followed.
- 3.All returned merchandise must be accompanied by a notice indicating date of purchase and the invoice number.
- Items must be in resellable condition.

#### **Damaged Shipments**

Please inspect shipments before signing the freight bill. A damaged or incomplete shipment should be noted on the freight bill. A claim must be filed with the carrier immediately.



McGee Company

**Albuquerque** 4412 Prospect NE

Albuquerque, NM 87110

8504 Chancellor Row Dallas, TX 75427

Denver

Salt Lake City 1140 S. Jason St. 1101 S. 700 W. Denver, CO 80223 Salt Lake City, UT 84104

1-800-525-8888

## McGee Company Service In Salt Lake City & Denver!




McGee Company Service has expanded to cover the whole Rocky Mountain Region. The McGee service team expanded to over 16 fully stocked service trucks between Denver & Salt Lake City. McGee Company Service can take care of all your lift, lube, and compressor needs. Our experts can help you design your air piping systems, lift installations and maintain your equipment to ensure your business is functioning.

Our fast, responsive, and well stocked Service Department, will keep your critical automotive equipment up and running. Prompt repair or replacement minimizes downtime and keeps your business flowing smoothly. We work around your busy schedule to maximize productivity. McGee Company Service can maintain a variety of equipment and automotive lifts.

## CAD drawings available Don't forget annual lift inspections for compliance and safety!







As one of our customers, you receive excellent service and support from the premier equipment service company in the Rocky Mountain Region; please help us keep your business operating at peak efficiency. Contact our service department at 1-800-525-8888 or email us at service@mcgeecompany.com at your convenience to get an appointment scheduled. We are really excited to expand our services in order to better help our customers succeed.

> Complete Air System Care for Compressors, Piping, & Air Dryers. Specializing in Champion and Quincy Compressors.





- Repair
- Maintenance
- Installation of new systems or updating old systems

#### Preventative Maintenance Agreements

Includes an oil and filter change. Also includes a report on the condition of the compressor and any recommended additional maintenance or repair items that may be needed.



#### **Quick Service**

McGee Service understands that down time costs you money. That is why we offer emergency service on your equipment. We work to get your compressor back in service as quickly as possible.





### The World's Most Trusted Lift...

Since 1925, Rotary Lift has built quality in to everything we do. As the oldest U.S. lift manufacturer, our lifts are built and cycle tested for years of trouble-free service and ALI certification. Rotary lifts are backed by full warranty and supported by McGee Company.



## SHOCKWAVE equipped lifts feature

- · 2X Faster rise and descent than standard lifts
- DC powered which reduces installation/operating costs
- Two standard Group 24 batteries charged by the 110v that runs the lift removes the need for expensive 220v wiring and can operate during power loss
- · Spotline motion activated laser helps spot vehicles the first time
- Available on lifts from 7,000-20,000 lbs



#### Two-post lifts

- Original "Double S" single piece column design maximizing strength
- Slider block bearings of Tivar 1000 polyethylene that self-lubricate and are maintenance free
- Overhead padded cutoff switch
- Adjustable height options with column extensions
- Asymmetrical and symmetrical designs to suit your needs
- Trio three stage arms for asymmetrical lifts
- Shockwave (10,000-20,000lbs) and standard (10,000-20,000lbs) configuration available in two-post
- Multi-position column locks

### ARO22 Alignment lift

- ·Alignment ready runway lift 22,000 lbs capacity
- •Robust open front design
- ·Air locking rear steel plates
- ·LED runway lighting system
- ·Air operated rolling jacks 9,000 lbs front and low profile 15,000 lbs rear comes standard!



#### Financing options available

- Any shop equipment is elgible based on approval
- Financing through Great America
- · Don't let cost stand in the way of increasing your productivity!



All new Trio" 2-piece, 3-stage arms Integrated, patented "third" stage adapter adjustment easily slides to a pinpoint location



#### Inground Smartlifts

- 10,000-12,000 lbs capacity models available
- · High efficiency power and air per lifting cycle, selected in key LEED projects
- · Reduces space usage and allows more lifts
- Trio three stage arms for pinpoint location
- Shockwave or standard available


#### Smartlift Green Features:

- · Uses only 19 quarts "Bio-Fluid"
- · An entirely closed system housed in a recycled polymer composite containment which protects the environment and the lift.



- •The Smartlift uses only .045 kWh of electricity and .01 cfm of air per lifting cycle.
- Steel components and housing can be harvested and recycled again at the end of the lift's lifecycle

Installation, Service, Maintenance, and Custom designed systems with CAD available for Lifts, Compressed Air, Lubrication, and Exhaust Systems!





Our experts can help you design your air piping systems, lift installations, and lubrication systems to fit your needs. Call today 1-800-525-8888!

## Five reasons why hose reels add value



Improve efficiency Hoses, cable and cords are where you want/need them.



**Increase safety** Reduce tripping accidents and lost work time.



Minimize leakages Reduce costs of air and water leakages.





Reduce hose wear Hose / cord on reels can last five times longer.



Increase productivity No more tangled hoses improves efficiency.

## Did you know we design complete systems

for your needs?

It doesn't matter the size of your shop, we have the right solution for you. We can design at your location with tablets to give you an idea of what it would look like for a new system or an upgrade before we bring it back to design in CAD.



Call today for your time and money saving system from the Graco pros at McGee Company. 1-800-525-8888

### **Graco Pumps & Accessories**



3:1 Affordable and full featured LD series is designed for lower volume applications.

246775 Fireball 225

Introducing Graço's classic Fire-Ball design as a 3:1



This pump has been the "crown jewel" of Graco since the 1950s and is the pump of choice in the most demanding environments.

## High Quality, Inexpensive, Double Wall Tanks!

- High density blow molded plastic, seamless inner tank
- Ul listed
- Easier and faster to fill

McGee #	Tanks
2335103401	110 Gallon Tank 29"W x 28"L x 44"H
2335101861	165 Gallon Tank 29"W x 28"L x 61"H
2335101862	275 Gallon Tank 43"W x 28"L x 61"H
2335102642	400 Gallon Tank 64"W x 30"L x 68"H

### Graco



AIR DIAPHRAGM PUMPS Unique double

3/4" 241906 **15 GPM** 647731 40 GPM

Metal, plastic, or combination tanks available



### Rhino Tuff Tanks

Square Stackable Rhino Tuff Tanks are available in 4 individual sizes including 80, 120, 180, 225, and 310 gallons. All tank sizes can be stacked with each other, in any combination, without the use of any converting brackets.

> TG99 new oil gauge



### **Tank Gauges**

Numbers decrease as fluid level lowers indicating how many are left until the tank is empty. For use with oil, waste. diesel fuel, antifreeze and other fluids with a high flash point.

8566 used oil gauge

## Maintenance & Installation Available!

## Graco Enclosed Hose Reel

24H658X Air 3/8" x 50' 24H662X OIL 1/2" x 35'

#### Features:

- Designed for light duty applications
- Enclosed for safety and protection. extended hose life
- 5 year warranty

218547X \*Required inlet hose kit sold separately.

### Oil King

- · Large 25 gallon capacity with sight gauge
- · Convenient tool trays and filter areas
- Large offset collection pan with screen
- Oversized tires to get over hoses and rough floors Splatter pads:

238866R Round 238866S Square





**Package** 

**Pricing Available!** 

## Wheel Mounting Procedures

Remove rust and dirt: Inspect all components: Snug wheel nuts: Torque to specification

### Remove rust and dirt from all mating surfaces



Wheel Openings and Pilot Pads



SC15563 Wire Brush & Q/C adapter



SC100 Stud Cleaner

15701035 Air Drill

Wheel Studs



Wheel Mating Surfaces SC14404 2 3/4"

Abrasive Poly Brush



**Hub and Brake Drum Face** 



SC14404 with Q/C Adapter



SC10157 1" Abrasive Poly Brush



Wheel Nut and Flanges



Handle Brush





The SC100 Stud Cleaner uses three long lasting heavy duty carbon steel brushes to clean rust and debris from the stud threads to ensure proper torque.

## Inspect all Components for Wear and Damage












## Lubricate Mounting Pads, Studs and Nuts \*\*\* Uni-Mount Only \*\*\*





o NOT Lubricate the Hub Face, Wheel Face or Brake Drum.




TIA recommends: lubricate Hub-Pilot studs and nuts with 2 drops 30w oil before tightening

## Pre-Torque Wheel Nuts to 65 ft lbs Rotate Wheel Mount Pad to 12 o'clock 75520 65# torque limiting extension

## Tighten Wheel Nuts to Final Torque



limiting extensions



NEW OSHA 29 CFR 1910.177 wheel mounting procedure manual and charts. These are required by OSHA to be displayed in truck tire service areas or carried in road service trucks \$7.95 each. One FREE with Torque wrench, Torque Set or Stud Cleaner.



4AR1 Break Back Torque Wrench

## Largest stock of tire chains in the Rocky Mountain Area!

10-15LT 28 265/70R15LT 29 265/70R15LT 29 265/70R15LT 23 305/50R15 214 31X10.50-15LT 25 33X10.50-15LT 25 33X10.50-15LT 26 265/70R16 P2 265/80R16LT 26 275/70R16 28 275/70R16 2	5/70R16LT 5/6SR16 5/5SR16LT 5/5SR16LT 5/80R17 5/75R17LT 5/60R17 55/70R17 55/70R17 55/70R17 5/70R17 5/70R17 5/6SR17 5/75R17 5/6SR17 5/6SR17 5/6SR16LT X11.50-16LT X11.50-16LT X11.50-16LT X10.50-16.5LT \$16.5LT \$10.50-16.5LT \$10.50-16.5LT \$10.50-16.5LT \$10.50-16.5LT \$10.50-16.5LT	235/75R17.5 245/70R17.5 245/75R17.5 255/65R18 P255/70R18 P255/70R18 275/55R18 265/60R19 275/55R19 225/70R19.5 245/60R20 305/45R17 P265/60R18 285/60R18 285/65R18LT 285/65R18LT 285/65R20	3210R	3210CAM
PR78-15 27:  31X11.50-15LT 32:  31X11.50-15LT 32:  32X11.50-15LT 34:  33X13.50-15LT 34:  33X13.50-15LT 32:  34X9.50-15LT 32:  75787816 28:  275/75R16 28:  2	5/65R16LT 5/60R16LT X11.50-16LT X13.50-16 X9-16 -16.5LT X10.50-16.5LT 5/60R17 5/70R17	305/45R17 P265/60R18 285/60R18 285/65R18LT 285/45R19 275/60R20		
275/75R16 26: 285/75R16LT P2: 31X12.50-16 27: 12-15LT 35: 79315/70R15 35: 325/60R15 36: 31X13.5-15 32:		P285/50R20	3227R	3227CAN
12-15LT 357 P315/70R15 357 325/60R15 367 31X13.5-15 327	5/70R18 75/60R18 5/65R18	275/50R20 275/45R21	3228R	3228CAN
33X12.50R15 33; 33X14.15 27; 33X14.50-15 28; 35X12.50-15 29; 35X14.5-15 30; 11L16 30; 285/70R16LT 33; 295/75R16LT 10; 305/70R16LT 27; 305/85R16LT 28;	X12.5-16 X13.5-16 X12.50-16.5LT X12.50-16.5LT X15.5-16.5 S/70R17 5/70R17LT 5/70R17LT 5/65R17 5/70R17 X12.50-17 X12.50-17 55/70R18LT 5/75R18LT	295/70R18LT 325/60R18 33X12.5-18 33X13-18 275/65R20LT 285/65R20LT 285/60R20 295/55R20 305/55R20 32X11.50-20 33X12.5-20 285/50R22 33X11.5-22	3229R	3229CAM
35X13.5-15 32: 37X13-15 34: 315/75R16LT 35: 345/55R16LT 37: 37X12.50-16 30: 38X13-16 30:	5/70R17LT 5/70R17 5/55R17 X12.50-17 X12.50-17 5/60R18 5/70R18LT 5/65R18	35X12.5-18 285/65R20 295/65R20 325/60R20 35X12.50-20 325/50R22LT 35X12.5-22 295/60R22.5	3231R	3231CAM
35X14-15 36X 36X12.50-15 37X 36X13.5-15 38X 37X13.50-15 35X 35X14-16 37X	X14-16.5 X12.5-16.5 X15.5-16.5 5/70R17LT X13.5-17 -17.5	37X13.5-18 285/70R19.5 275/75R20 37X12.50-20	3235R	N/A
37X14.50-15 38) 39.5X15-15 39. 40X17-15 40) 325/80R16 35	X14.50-16 .5X15-16.5 X17-16.5 5/65R18	37X13.50-20 37X13.50-22	3251R	N/A
	-22.5 5/65R22.5		3255R	3255CAN
	5/65R22.5		3261R	N/A
38.5X16-15 39. 39.5X18-15 39. 38.5X16-16 38	.5X15-16 .5X18-16.5 X15.5-18	15-19.5 38X15.50-20	3265R	N/A
445/50R22.5 455 445/65R19.5 16.			3269R	3269CAN







**Dual Truck Chains** 



**DUO Tractor Chains** 

Tire Sizes					No.
9.5-24	9.5-28	11.2-24			DU0214
9.5-32	11.2-28	230/95R32	355/80R20		DU0226
10.5/80-18	12-16.5	280/70R20	300/70R20	315/75D15	DU0225
12.4-24					DU0229
9.5-36	9.5-38	11.2-32	12.4-28		DU0218
13.9-36	320/85R34				DU0242
13.6-24	13.6-26	14.9-24	25		DU0240
14.9-26					DU0250
14.9-28	14.9-30				DU0252
13.6-28	16.9-24	320/85R38	340/85R28	380/85R34	DU0260
14.9-38	15.5-38	320/90R46			DU0254
17.5-24	17.5L-24		7		DU0263
16.9-26	16.9-28	420/85R28	45		DU0262
16.9-34	230/95R44	ALABAT POMILITARE DE CO			DU0270
18.4-16.1	21.5L-16.1				DU0264
18.4-24	19.5L-24		7		DUO268
16.9-30 550/65R25	18.4-26 600/65R28	18.4-28	18.4-30	540/65R30	DU0271
18.4-34	480/85R34	600/65R25			DUO273
16.9-38 480/80R38	18.4-38	20.8-34	420/80R46	460/85R34	DU0272
18.4-42	18.4-46	380/90R54	480/80R46		DU0277
20.8-38					DU0276
24.5-32	23.1-34	28.1-34	650/75R32		DU0282

## Laclede Tire Chains for all your needs!

	2.0			15
				Grader Stock No.
13.00-25	14.00-20	14.00-21	15.5-25	2612
14.00-25	400/75R28			2615
16.00-21	17.5-25			2624
16.00-25				2627
	75			2633
	10. 7			2645
30.5R32	710/70R38	755/70R25	800/65R32	2657
	13.00-25 14.00-25 16.00-21 16.00-25	13.00-25 14.00-20 14.00-25 400/75R28 16.00-21 17.5-25 16.00-25	13.00-25 14.00-20 14.00-21 14.00-25 400/75R28 16.00-21 17.5-25 16.00-25	13.00-25 14.00-20 14.00-21 15.5-25 14.00-25 400/75R28 16.00-21 17.5-25 16.00-25

#### **LG Cam Series** Available





& 29229

458-29110 29110 458-29225 29225

458-06304 6304

Ascot No.



Mfg. No.

29229

6302

39110



**Tire Chain Adjusters** 

Passenger Car - Rubber Arm Blue

Light Truck - Rubber Arm Grey

Heavy Truck - Rubber Arm Green

Passenger Car - Rubber

Light Truck - Rubber

Light Truck - Spring

Tractor/Grader - Spring

Heavy Truck - Rubber

Description

Spider Truck



No. 39110 & 39229

Qty.

2 per bag

1 pair per container

1 pair per container

Trucks Nos 39925

1	(Chains installed as tight as possible by hand.)		
enger Car	Location 14- Obel 15		

30 MPH-Max. Chain Life

40 MPH-57% Chain Life

50 MPH-31% Chain Life

NODRAL

LOOSE (Chains loosened by one link each side.)

Dallas

30 MPH-50% Chain Life

40 MPH-16% Chain Life

50 MPH-7% Chain Life









## McGEE COMPAN



Salt Lake City 1101 S. 700 West Salt Lake City, UT 84104

(800) 525-8888 (801) 487-8751 FAX (801) 487-8753

Albuquerque 4412 Prospect NE Albuquerque, NM 87110 (800) 525-8888

8504 Chancellor Row Dallas, TX 75427 (800) 525-8888 (505) 883-9613 FAX (505) 883-1382 (214) 689-0400 FAX (214) 689-0448

#### Studding Equipment

Studded tires are the best choice for winter driving. McGee Company has all the tools to stud tires to give your customers all the traction they need.



# AUTOSOCK the alternative to chains

- ⊗ Only approved ATD nationwide!
- Less weight than chains
- No damage to vehicle
- No climbing under vehicles to grab broken chains
- Great for low wheel clearance vehicles



AutoSock is a textile wheel cover with an elastic edge that allows you slip them over your drive tires. Recognized worldwide for passenger vehicles all the way to commercial trucks. AutoSock is approved by a variety of OE manufacturers like Mercedes, Toyota, and Honda. They are compatible with electronic traction and stability devices.

### How do they work?

Dry snow and ice sticks to fabric, especially 'woolly' fabric as those of us who remember snowballing in woolen mittens will remember. AutoSock is made from a hairy fabric which sticks to the snow. The fibers, which become hairier with use, are arranged at right angles to the direction of travel to optimize grip.











Showroom displays for the floor or counter available!



CMV and Passenger sizes

## Jet Tire Repair Materials

## Premium Quality Chemical Vulcanizing Rubber Patches



Jet Radial Repairs - Passenger & Light Truck Jet Center-Over-Injury Repairs are designed for use in all radial tires. The Jet Radial Repair is intended for use in HOT or COLD applications. Jet Radial Repairs are designed for use in the crown, sidewall and shoulder of radial tires. Install with Jet Fast Dry Vulcanizing Cement. Refer to the Jet Repair Chart for proper selection of the repair unit. Always fill the injury channel with the appropriate Jet

Radial Repair Units

repair material.








Donairunit	Siz	O+1/0-11	
Repair unit	Inch	mm	Qty/Box
R110	23/4 x 2	70 x 50	20
R110H	3 1/4 x 2 3/8	80 x 60	20
R112	4 3/8 x 2 1/2	110 x 65	20
R114	5 3/4 x 3	145 x 75	10
R120	5 x 3	125 x 75	10
R122	6 7/8 x 2 3/8	175 x 80	10
R124	8 1/4 x 3 3/8	210 x 85	10
R126	10 1/4 x 3	260 x 75	10

**Fast Dry Vulcanizing Cement** Jet Fast Dry Vulcanizing Cement is formulated to provide outstanding performance when used with Jet Repair materials.

### Pre-Buff Cleaner


Jet Pre-Buff Cleaner is formulated to remove contaminants and silicone from the innerliner of the tire prior to buffing.











Repair Unit	Si	Qty/Box	
Kepaii Oliic	inch	mm	Qty/ box
CU03	1/8	3	20
CU06	1/4	6	25
CU08	5/16	8	25
CU10	3/8	10	10

Universal Combi







Universal repairs - nail hole injuries in crown area only. Techno cushion gum for max adhesions.

#### Bias/Radial - Universal Repair - Round/Square

Repair unit	Size		Qty/Box	
	Inch	mm	Qty/box	
AR45	13/4	45	30	
AR451000	13/4	45	1000	
AR55	2 1/8	55	30	
AR551000	2 1/8	55	1000	
AR75	3	75	30	





AR- Round AS - Square

#### Innerliner Overbuff Sealant

Designed to restore air retention qualities to the buffed innerliner around the repair after installations. It can be used in both COLD and HOT vulcanizing systems.

McGee # Description		Size
1747J	Innerliner Sealer	16 fl oz



Jet Bead Sealer provides a seal between the bead area of the tire and rim, assisting in the prevention of leaks caused by minor surface imperfections.

McGee#	Description	Size
17701	Bead Sealer	32 fl oz



#### McGee Company carries MRT approved Jet Ultra Series Envelopes

- · New modern metric molds designed by envelope industry veteran of compression molding technology
- Cross section design specifically for MRT double envelope process.
- The industry's ONLY seamless inner envelope that correctly fits North American tire sizes
- Advanced compound technology for longer service and better heat transfer
- · More cures per envelope ensuring reduced costs for you!

Additional Jet products available

# AUTEL® MX-sensor 1 SENSOR

COMBINE BOTH FREQUENCIES

315MHZ + 433MHZ







## ORIGINAL EQUIPMENT

**FIT FORM & FUNCTION** 



PROGRAMMABLE UNIVERSAL TPMS



99% VEHICLE COVERAGE



1-SKU SENSOR INVENTORY



MAX SIGNAL STRENGTH



SUPERIOR BATTERY LIFE



## COMPLETE

OE QUALITY SENSORS



## SOLUTION

**POWERFUL SCAN TOOLS** 

UPDATES POWERED BY AUTEL DIAGNOSTICS

## TS508 TPMS

#### TPMS SERVICE TOOL

- READ & RELEARN ALL KNOWN SENSORS4 MX-SENSOR PROGRAMMING METHODS
- EXCLUSIVE TPMS STATUS SCREEN
- DOWNLOAD FREE SOFTWARE UPDATES
- TIRE PRESSURE PLACARD VALUE RESET











TS608 SERVICE & TPMS



## CONTENTS

4E	AIR SYSTEMS
15	AIR SISIEMS

Compressor Selection Guide	17
Building an Efficient Air System	18
Air Compressors & Dryers	19
Nitrogen Tire Filling Systems	32
Air Preparation Products	34
Air Hoses, Hose Reels & Hose Products	38
Air Line Counters Plugs & Accessories	1.1.

## **AIR TOOLS**

mpact Wrenches (CP)	
Sanders & Air Ratchets (CP)	
Buffers, Grinders, Drills & Accessories (CP)	
RPG Air Tools	
Milwaukee Air Tools	
Air Tool Lubricants & Conditioner	
mpact Wrenches (IR)	
Grinders, Buffers, Sanders & Drills (IR)	
Air Tool Accessories	
Nork Stations	

## WHEEL SERVICE PRODUCTS

Impact Sockets	90
Wheel Torque Products	96
Loose Nut Prevention	106
Wheel Centering Products	110
Lug Nut Removal Products	112
Wheel Attaching Hardware	118
Tire & Wheel Service Tools	124
Stud & Hub Cleaning Tools	128





## CONTENTS (cont.)

Tire Lubricants & Sealants  Markers  Tire Branders  Bead Breakers  Hydraulic Pumps, Hydraulic Rams  OTR Service Tools  Cribbing Sets & Wheel Chocks  Bead Seating Devices  Chloride Pumps  Mount/Demount Tools  Small Mount/Demount Tools  Lock Ring Tools  Heavy Duty Hammers  General Purpose Hammers  & Wedges	LIFTING EQUIPMENT	
Jack Stands Specialty Jacks Transmission Jacks Wheel Dollies Vehicle Stands & Accessories Hydraulic Shop Presses Shop Cranes Brake Drum Handlers TIRE & WHEEL SERVICE Tire Lubricants & Sealants Markers Tire Branders Bead Breakers Hydraulic Pumps, Hydraulic Rams OTR Service Tools Cribbing Sets & Wheel Chocks Bead Seating Devices Chloride Pumps Mount/Demount Tools Small Mount/Demount Tools Lock Ring Tools Heavy Duty Hammers General Purpose Hammers & Wedges	Portable Bottle Jacks	
Specialty Jacks Transmission Jacks Wheel Dollies Vehicle Stands & Accessories Hydraulic Shop Presses Shop Cranes Brake Drum Handlers TIRE & WHEEL SERVICE Tire Lubricants & Sealants Markers Tire Branders Bead Breakers Hydraulic Pumps, Hydraulic Rams OTR Service Tools Cribbing Sets & Wheel Chocks Bead Seating Devices Chloride Pumps Mount/Demount Tools Small Mount/Demount Tools Lock Ring Tools Heavy Duty Hammers General Purpose Hammers & Wedges	Service Jacks	
Transmission Jacks Wheel Dollies Vehicle Stands & Accessories Hydraulic Shop Presses Shop Cranes Brake Drum Handlers TIRE & WHEEL SERVICE Tire Lubricants & Sealants Markers Tire Branders Bead Breakers Hydraulic Pumps, Hydraulic Rams OTR Service Tools Cribbing Sets & Wheel Chocks Bead Seating Devices Chloride Pumps Mount/Demount Tools Small Mount/Demount Tools Lock Ring Tools Heavy Duty Hammers General Purpose Hammers & Wedges	Jack Stands	
Wheel Dollies	Specialty Jacks	
Vehicle Stands & Accessories	Transmission Jacks	
Hydraulic Shop Presses Shop Cranes Brake Drum Handlers TIRE & WHEEL SERVICE Tire Lubricants & Sealants Markers Tire Branders Bead Breakers Hydraulic Pumps, Hydraulic Rams OTR Service Tools Cribbing Sets & Wheel Chocks Bead Seating Devices Chloride Pumps Mount/Demount Tools Small Mount/Demount Tools Lock Ring Tools Heavy Duty Hammers General Purpose Hammers & Wedges	Wheel Dollies	
Shop Cranes Brake Drum Handlers  TIRE & WHEEL SERVICE  Tire Lubricants & Sealants Markers Tire Branders Bead Breakers Hydraulic Pumps, Hydraulic Rams  OTR Service Tools Cribbing Sets & Wheel Chocks Bead Seating Devices Chloride Pumps Mount/Demount Tools Small Mount/Demount Tools Lock Ring Tools Heavy Duty Hammers General Purpose Hammers & Wedges	Vehicle Stands & Accessories	
TIRE & WHEEL SERVICE  Tire Lubricants & Sealants Markers Tire Branders Bead Breakers Hydraulic Pumps, Hydraulic Rams OTR Service Tools Cribbing Sets & Wheel Chocks Bead Seating Devices Chloride Pumps Mount/Demount Tools Small Mount/Demount Tools Lock Ring Tools Heavy Duty Hammers General Purpose Hammers & Wedges	Hydraulic Shop Presses	
TIRE & WHEEL SERVICE  Tire Lubricants & Sealants  Markers  Tire Branders  Bead Breakers  Hydraulic Pumps, Hydraulic Rams  OTR Service Tools  Cribbing Sets & Wheel Chocks  Bead Seating Devices  Chloride Pumps  Mount/Demount Tools  Small Mount/Demount Tools  Lock Ring Tools  Heavy Duty Hammers  General Purpose Hammers  & Wedges	Shop Cranes	
Tire Lubricants & Sealants  Markers  Tire Branders  Bead Breakers  Hydraulic Pumps, Hydraulic Rams  OTR Service Tools  Cribbing Sets & Wheel Chocks  Bead Seating Devices  Chloride Pumps  Mount/Demount Tools  Small Mount/Demount Tools  Lock Ring Tools  Heavy Duty Hammers  General Purpose Hammers  & Wedges	Brake Drum Handlers	
Markers Tire Branders Bead Breakers Hydraulic Pumps, Hydraulic Rams OTR Service Tools Cribbing Sets & Wheel Chocks Bead Seating Devices Chloride Pumps Mount/Demount Tools Small Mount/Demount Tools Lock Ring Tools Heavy Duty Hammers General Purpose Hammers & Wedges	TIRE & WHEEL SERVICE	<u>:</u>
Tire Branders Bead Breakers Hydraulic Pumps, Hydraulic Rams OTR Service Tools Cribbing Sets & Wheel Chocks Bead Seating Devices Chloride Pumps Mount/Demount Tools Small Mount/Demount Tools Lock Ring Tools Heavy Duty Hammers General Purpose Hammers & Wedges	Tire Lubricants & Sealants	
Bead Breakers Hydraulic Pumps, Hydraulic Rams OTR Service Tools Cribbing Sets & Wheel Chocks Bead Seating Devices Chloride Pumps Mount/Demount Tools Small Mount/Demount Tools Lock Ring Tools Heavy Duty Hammers General Purpose Hammers & Wedges	Markers	
Hydraulic Pumps, Hydraulic Rams  OTR Service Tools  Cribbing Sets & Wheel Chocks  Bead Seating Devices  Chloride Pumps  Mount/Demount Tools  Small Mount/Demount Tools  Lock Ring Tools  Heavy Duty Hammers  General Purpose Hammers  & Wedges	Tire Branders	
Hydraulic Pumps, Hydraulic Rams  OTR Service Tools  Cribbing Sets & Wheel Chocks  Bead Seating Devices  Chloride Pumps  Mount/Demount Tools  Small Mount/Demount Tools  Lock Ring Tools  Heavy Duty Hammers  General Purpose Hammers  & Wedges	Bead Breakers	
Cribbing Sets & Wheel Chocks Bead Seating Devices Chloride Pumps Mount/Demount Tools Small Mount/Demount Tools Lock Ring Tools Heavy Duty Hammers General Purpose Hammers & Wedges		
Bead Seating Devices Chloride Pumps Mount/Demount Tools Small Mount/Demount Tools Lock Ring Tools Heavy Duty Hammers General Purpose Hammers Wedges	OTR Service Tools	
Chloride Pumps  Mount/Demount Tools  Small Mount/Demount Tools  Lock Ring Tools  Heavy Duty Hammers  General Purpose Hammers  Wedges	Cribbing Sets & Wheel Chocks	s
Chloride Pumps  Mount/Demount Tools  Small Mount/Demount Tools  Lock Ring Tools  Heavy Duty Hammers  General Purpose Hammers  Wedges	Bead Seating Devices	
Mount/Demount Tools Small Mount/Demount Tools Lock Ring Tools Heavy Duty Hammers General Purpose Hammers & Wedges		
Small Mount/Demount Tools Lock Ring Tools Heavy Duty Hammers General Purpose Hammers & Wedges		
Heavy Duty Hammers General Purpose Hammers & Wedges		
Heavy Duty Hammers General Purpose Hammers & Wedges	Lock Ring Tools	
General Purpose Hammers & Wedges		
	General Purpose Hammers	
replacement namales	Replacement Handles	

243	VALVE	HARD	WARE
-----	-------	------	------

PMS Best Practices
PMS Relearn Chart
PMS Sensor Activation Tools
PMS Accessories & Kits
PMS Tools
Z-Sensor & REDI-Sensor PMS Transmitters
chrader TPMS Transmitters
ill TPMS Transmitters
UF Intellisens Universal Sensors Aftermarket TPMS Accessory Kits
PMS Retrofit Kits, TPMS Systems
mart Sensor Pro+
raining & Promotional Materials
ill TPMS Cabinets
ubeless Tire Valves (Passenger) <sub>-</sub>
ubeless Tire Valves (Truck)
ruck & Specialty Valves
alve Caps, Cores & Extensions _
pecial Application Products
.ir/Liquid/Agricultural Valves
arge Bore Valves
arge Bore Extensions
-Bore Valve System
T Valve System
alve Hardware Tools
ire Gauges
ill USA Gauges
ill USA Chucks
ir Chucks
nflator Gauges





Shop Service Tools

Automatic Tire Inflation Systems \_\_\_\_\_

Wrenches & Lug Wrenches 228

Safety Inflation Cages \_\_\_\_\_

## CONTENTS (cont.)

331	SERVICE EQUIPMENT	
	The Coats® X-Series	3
	The Coats® RC-Series	
	Coats® Tire Changers	3
	CEMB Tire Changers	3
	Corghi Tire Changers	3
	Tire Changer Accessories	3
	Coats® Heavy Duty Tire Changers	3
	Heavy Duty Tire Changer Accessories_	3
	CEMB Heavy Duty Tire Changers	3
	Corghi Heavy Duty Tire Changers	3
	Coats® Direct Drive Wheel Balancers_	3
	Coats® Wheel Balancers	
	CEMB Digital Wheel Balancers	3
	Corghi Wheel Balancers	3
	Wheel Balancer Accessories	3
	Brake Lathes	3
	Brake Lathe Acessories & Adapters	
	Tool Bits/Carbide Inserts	3
	Challenger Lifts	
	Rubber Blocks & Lift Pads	3
	Rolling Jacks & Work Stations	3
389	WHEEL BALANCING SUPPLIE	S
	Passenger Car Wheel Weights	3
	Truck Wheel Weights	3
	Adhesive Wheel Weights	4
	Wheel Weight Displays	4
	Wheel Weight Tools	4
	Tire Balancing Compounds	4
423	ALIGNMENT	
	Alignment Tool Assortment Sets	4
	Camber/Caster Tools	
		4

447	<b>AUTO &amp; FLEET</b>
	SERVICE EQUIPMENT

Battery Chargers & Testers	
Service Equipment	
Lubricants & Sealants	
Exhaust Hoses & Tailpipe Adapter	s_
Bench Grinders & Shop Vises	
Pliers & Screwdrivers	
Shop Cleaners & Brushes	
Shop Lights & Service Stickers	
Tire Displays, Racks & Carts	
Interior Protection Products	
Stud Guns & Studding Equipment	_
Fluid Pumps	
Drains & Pumps	
Oil Accessories	
Safety Products	
Wheel Chocks	
Rubber Blocks & Lift Pads	
Mechanic's Gloves	



Automotive Alignment Equipment \_ 444

## CONTENTS (cont.)

491	FLUID EXCHANGE	
	Recovery & Recycling Systems	492
	FX Series Refrigerant	
	Management Systems	494
	Fluid Exchangers & Flushers	495
	Fluid Exchange Accessories	496
497	TIRE REPAIR MATERIALS	
	Tire Repair Cabinets & Kits	499
	Cements, Sealants & Patches	500
	Thermopress & Extruders	532

Monaflex Tire Repair System

Tire Repair Tools & Accessories

Tire Spreaders & Repair Stations \_\_\_

Air Buffers & Drills

Repair Cabinet

KLIKLADINO		
Rasp Blades & Spacers		56
Retread Accessories		57
Retread Consumables		57
Tire Appearance		57
Envelopes		58
Retread Related Items		584
MEASUREMENT CONVERSION CHART		58!
ALPHABETICAL INDEX _		58
	Retread Accessories Retread Consumables Tire Appearance Envelopes Retread Related Items  MEASUREMENT CONVERSION CHART	Rasp Blades & Spacers Retread Accessories Retread Consumables Tire Appearance Envelopes Retread Related Items  MEASUREMENT CONVERSION CHART

NUMERICAL INDEX

RETREADING

## ASCOT SUPPLY CORP. IS NOT RESPONSIBLE FOR INADVERTENT TYPOGRAPHICAL ERRORS OR OMISSIONS.

537

- Tire and Rim Servicing can be dangerous, and should be done by trained personnel using proper tools and procedures. The Occupational Safety and Health Administration has a safety standard for the servicing of single-piece and multi-piece rim wheels (OSHA std 29 CFR 1910.177) to include requirements for the safe servicing of rims used on passenger, truck, trailers, buses and off-road vehicle equipment. Properly trained personnel should perform all tire servicing. Failure to comply with these procedures as well as procedures recommended by Tire Manufacturers and Wheel and Rim Manufacturers may result in faulty positioning of the tire and or rim and may cause the assembly to burst with explosive force sufficient to cause serious physical injury or death.
- The sole intent of this catalog is to aid the Ascot Distributors and their customers in the resale of automotive related parts. This catalog, or any part thereof, may not be reproduced in any form without written consent from Ascot Supply Corp.
- Ascot and the "Ascot Logo" are marks of Ascot Supply Corporation. The products in this catalog are manufactured for distributors of Ascot Supply Corp. and their customers.
- Caution and Warning statements appear throughout this catalog. Use of products in this catalog contrary to specifications and directions may result in personal injury and/or property damage.
- WARRANTY DISCLAIMER: Ascot Supply Corp. has made a diligent effort to illustrate and describe the products in this catalog accurately; however, illustrations, photos and descriptions are for the sole purpose of identification and do not express or imply a warranty that the products are merchantable, or fit for a particular purpose, or that the products will necessarily conform to the illustrations, photos or descriptions. Ascot Supply Corporation or its Distributors make no warranty or affirmation of fact, express or implied.
- Lead is harmful if ingested. Wash thoroughly after handling and before eating, drinking or smoking. Keep away from children and pets.

- O.S.H.A. HAZARDOUS SUBSTANCE AND CALIFORNIA PROPOSITION 65 PRODUCT INFORMATION: Material Data Safety Sheets for products containing OSHA defined hazardous substances and a list of products known to the state of California to cause cancer, birth defects, or other reproductive harm are available upon request from Ascot Supply Corp.
- Ascot Supply Corp. disclaims all express and implied warranties, including the implied warranties of merchantability and fitness for a particular purpose. Ascot Supply Corp. also disclaims liability for personal injury, property damage or consequential damages.
- IMPORTANT: Snap-In passenger valve stems are safe for tire pressures up to a maximum of 60 psi (cold tire pressure) and for a maximum rim thickness of .156" (3.96mm). If greater pressure or rim thickness is required, metal clamp-in
- Ascot Supply Corp. Does Not recommend "temporary" tire repairs. All repairs should perform the function of filling or replacing the injured section as recommended by the RMA and other industry associations.
- Always wear eye protection when using air tools, wheels, cups and rasps.
- WARNING: Always wear safety goggles when using striking or struck tools. Never use one hammer to strike another hammer. Never use a striking tool with a loose or damaged handle. Discard any striking or struck tool if it shows dents, cracks, chips or mushrooming.
- CAUTION: Use all chemicals and cements in a well ventilated area. Avoid prolonged breathing or inhalation of vapors.
- For best results, check tire pressure when tires are cold or when the vehicle has not been driven for several hours. Readings taken after prolonged driving at high speeds will increase tire pressure causing a false reading. Check tire pressure at least once a week or as necessary.



# INTELLIGENT TECHNOLOGY

CODE READERS • TPMS SERVICE • DIAGNOSTIC TABLETS



## POWERFUL **DIAGNOSTIC TOOLS**

- All System AutoSCAN
- Pre/PostScan Reports
- Android Operating System
- Service Maintenance Functions
- OBDII Connector Kits Included

## COMPLETE TPMS SOLUTION

- Exclusive TPMS Status Screen
- Up to 4 Methods MX-Sensor Programming
- On-Tool Relearn Procedures
- Read/Activate All Known Sensors
- Compatible with Autel MX-Sensors

## INNOVATIVE

#### **ADAS SYSTEMS**

- Standard & MA600 Systems
- Portable MA600 Frame
- Step-by-Step Instructions
- LDW, AVM, RCW, Radar & Night Vision System Coverage

**AUTEL** IS THE **ONLY** TPMS MANUFACTURER TO OFFER TPMS TOOLS & SENSORS

**MX-sensor** 1 SEN

1-SKU INVENTORY





- 99% Vehicle Coverage
- Re-Programmable Sensors Meets All SAE Standards





## **DISINFECTANT/FOGGER SYSTEM**



Ascot Supply's new & efficient all-inone Fogger/Sanitizer cleaning system shoots a steady mist of EPA Registered solution to thoroughly clean even the hardest to reach spaces. With a reach of 6 feet and an operator-friendly trigger, the fogger is ideal to kill germs associated with the Coronavirus in all environments.

With a dilution of 3 oz. sanitizer per 5 gallons of water, the solution will last for countless uses.

Keep your business safe and clean with this proven, fast-acting and odorfree combination. Perfect for use in vehicles, tire and auto dealers, truck companies, repair shops, service bays & equipment, warehouses, rental companies, bus companies and everything in between.

## Ascot No. 395-95000

## SANITIZER/DISINFECTANT SOLUTION

Ascot No. 395-60414 (4) 1-Gal Bottles

Ascot No. 395-60415 5-Gal Pail

Ascot No. 395-60430 30-Gal Drum

▲ WARNING: For more information go to www.P65Warnings.ca.gov.

ASCOT SUPPLY CORPORATION PO Box 71459

Newnan, GA 30265

Tel.: 770.251.7330 Fax: 770.251.7481 www.ascotsupply.com YOUR ONE SOURCE FOR QUALITY BRAND NAME EQUIPMENT, TOOLS

## Air Systems •

Air Compressors | Dryers | Nitrogen Tire Filling Systems Air Preparation Products | Air Hoses | Hose Reels Air Line Couplers | Air Line Plugs | Accessories





## The Mechanic's Choice



Champion offers a complete line of compressors as well as a wide array of aftermarket items to ensure excellent air quality. From various models of air dryers to filters and piping, Champion has the products to allow for a total air system to be installed no matter what the customer's application.



- Oil-Flooded Rotary Screw
- Belt Drive, Fixed Speed
- 5-40 HP
- 100-190 PSIG
- 26-193 CFM
- Load/No Load Controls (Fixed Speed)
- Tank or Base Mounted with Optional Dryer Configurations

- Two-Stage Reciprocating compressor
- 5-25 HP Range
- 175 PSIG
- 17.3-90.1 CFM
- Vertical & Horizontal Tanks
- Fully Packaged
- Simplex or **Duplex Configurations**
- Available for Immediate Shipment
- Control panel featuring control voltage transformer

- Two-Stage Engine Driven compressor
- 9-23 HP Range
- 175-250 PSIG
- 17.9-39.5 CFM
- Splash or Pressure Lubricated
- Horizontal or **Base Mounted**
- Compressor/Generator Combo Unit Available

LEADER IN MANUFACTURING DEPENDABLE COMPRESSED AIR SYSTEMS

GIAMPION

- Two-Stage Reciprocating Compressor
- 2-15 HP Range
- 125-175 PSIG
- 4.9-49.0 CFM
- Vertical & Horizontal Tanks (depending on model)
- **Electric Starter** (where applicable)



## Compressor Guide

## SIZING AN AIR COMPRESSOR

- 1 List the types of pneumatic devices/equipment to be used and how many will be used at the same time.
- 2 Add total of air volume (SCFM) required by pneumatic tools being used. Utilize the chart below.
- 3 Add additional 25% to compensate for airline leaks and pressure drops.
- 4 Identify the air compressor that will provide necessary SCFM. The following professional electric 2-stage compressors provide the listed:

#### SCFM\*

HP	SCFM	HP	SCFM	
5 HP	17.2 SCFM	15 HP	42 SCFM	
7.5 HP	24 SCFM	25 HP	97 SCFM	
10 HP	35 SCEM	30 HP	106 SCFM	

\*SCFM Ratings at Sea Level

**5** Once the correct HP rating has been selected based on the air volume requirements and voltage of compressor, you will need to know the type of available electric service to determine the need for a single phase or three phase compressor.

#### EXAMPLE

TOOLS BEING USED	SCFM
Tire Changer	5.5 SCFM
1/2" Impact Wrench	3.5 SCFM
3/4" Impact Wrench	7.5 SCFM
Hydraulic Lift	6.0 SCFM
SUBTOTAL	22.5 SCFM
	X 1.25%
TOTAL SCFM	28.125 SCFM

compressor that produces a minimum of 28.125 SCFM @ 175 PSI. Customer will need a 10 HP compressor or two 5 HP compressors.

#### **TERMINOLOGY: General Definitions**

COMPRESSORS	Machines for compressing air or gas from an initial intake pressure to a higher discharge pressure.
SINGLE-STAGE COMPRESSORS	Those machines in which compression from initial to final pressure is completed in a single step or stage typically less than 100 PSI.
TWO-STAGE COMPRESSORS	Those machines in which compressions from initial to final pressure is completed in two distinct steps or stages typically greater than 100 PSI.
INTERCOOLERS	Devices for removing the heat of compression of the air or gas between consecutive states of multistage compressors.
LOAD FACTOR	The ratio of average compressor output during a period of actual use to the continuous rated output of the machine.
PISTON DISPLACEMENT (PD)	Piston Displacement (PD) is determined by precisely measuring a volume of air which has been raised to a specific pressure and is expressed in conditions existing at the compressor discharge. This flow rate is generally stated in terms of actual cubic feet per minute (CFM).

	TERMINOLOGY: Accessories
MAGNETIC STARTERS	Magnetic Starters provide thermal overload protection for motors and are recommended for 3 HP and larger motors.
AFTERCOOLERS/ DRYERS	Aftercoolers/Dryers remove moisture from the air line as air cools from compressor.
AUTOMATIC TANK DRAIN	Automatic Tank Drain automatically removes water that has accumulated in the compressor tank as air cools.
LOW OIL SWITCH	This switch prevents the air compressor from operating when oil is low. $ \\$

#### COMPRESSOR SELECTION GUIDE

After listing all the air operated devices to be supplied by the air compressor, determine from the chart, pressure range and volume of air required by each device. The air compressor must maintain a minimum pressure at least equal to the highest of the pressure ranges. Always use free air (CFM) and pressure (PSI) from the nameplate on device or from manufacturer. Free air figures in the table are averages and should not be considered accurate for any specific brand.

PSI	TOOL	CFM*					
	PORTABLE TOOLS						
70-100	Air Filter Cleaner	3					
70-100	Body Polisher	20					
70-100	Body Sander	10					
70-100	Brake Tester	4					
70-100	Carbon Remover						
90-100	Dusting Gun (Blow Gun)	3					
70-100	Panel Cutter	4					
70-90	Drill 1/16" - 3/8"	4					
70-90	3/8" Impact Wrench	3					
70-90	1/2" Impact Wrench	4					
70-90	5/8" Impact Wrench	5					
70-90	3/4" Impact Wrench	8					
70-90	1" Impact Wrench	12					
70-90	Die Grinder	5					
90-100	Vertical Disc Sander	20					
90-100	Small File/Saw Machine	3					
90-100	Large File/Saw Machine	5					
90-100	Tire Buffer	5					
	TIRE TOOLS						
90-100	Hydraulic Lift	6					
90-100	Paint Gun - Production	8					
90-100	Paint Gun - Touch Up	4					
125-150	Rim Stripper	6					
125-150	Tire Changer	1					
125-150	Tire Inflation Line	2					
125-150	Tire Spreader	1					
	CEM I I' I I I I I I I I I I I I I I I I I						

<sup>\*</sup>Approximate CFM. Individual Equipment may Vary




## 18 AIR SYSTEMS // THE BASICS

Building an Efficient Air System

## A Good Filtration System


#### How it works

Water and dirt cause more problems in compressed air lines than anything else. A typical 7.5 HP compressor brings in an average of 3 gallons of water from the atmosphere per day along with dust and dirt. It is important to eliminate water and dirt from your air system. A good filtration system will extend the life of your tools and eliminate downtime and unnecessary service calls on your equipment.

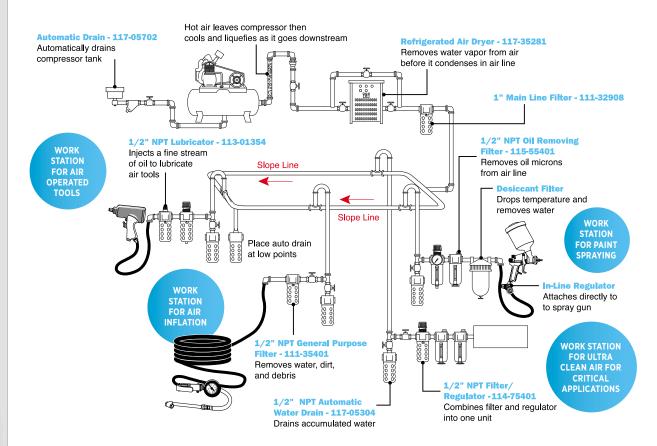

#### 5 IMPORTANT STEPS TO A WORK STATION DROP

- Main line filter and regulator should be placed at least 20 feet from the compressor. The air will cool down, allowing much of the water vapor to condense naturally for removal by filtration.
- Main line piping should slope down from point of origin by 1/8" per foot. Any water in the line will flow down to the lowest point for draining.
- 3 All line drops (work stations) should be taken from the top of the main line. This prevents water which forms in the main line from flowing into branch lines.
- Galvanized pipe is recommended when building an air system.
- Follow illustration(s) when building a work station drop.
- 6 Use manufacturer recommended lubrication oil or AW32.



Place a drain trap at low points to remove water. Also utilize on main line at low points.

CHAMPION

## **Advantage Series**

The Advantage Series is a fully packaged unit with all of the additional accessories customers need included. Advantage series compressors are typically shipped from the factory in 24 hours or less. Compressors are shipped ready to install and operate. Each new assembled unit comes with a standard threeyear standard warranty, with option for a six-year extended warranty with the purchase of an extended warranty kit.

## RECIPROCATING AIR COMPRESSOR

■ 5-25 HP ■ **MAXIMUM** PRESSURE: Up to 175 PSIG ■ 17.0 to 203.6 ACFM at 175 PSIG • Two Stage, Splash Lubricated • Tank-Mounted, Simplex and Duplex Models Vertical or Horizontal Configurations ■ Package comes standard with

up to six pre-installed options ■ Factory filled with ChampLub lubricant ■ Control panel with control voltage transformer











ASCOT NO.	MFG. NO.	HP OR HPD	PART NO.	PUMP MFG. NO.	VOLTS	TANK CAPACITY (GAL.)*	175 PSI RATING CFM DEL'Y	RPM	DIMENSIONS (LXWXH)	APPROX. SHIP WEIGHT (LBS.)
101-00058	VR5-8	5	ADVA-S01	R-15B	230/1	80V	17.0	737	35 x 27 x 75	590
101-00078	VR5-8	5	ADVA-S05	R-15B	208/3	80V	17.0	737	35 x 27 x 75	590
101-00158	VR5-8	5	ADVA-S126	R-15B	230/1	80V	17.0	737	35 x 27 x 75	590
101-01012	VR5-8	5	ADVA-S03	R-15B	230/3	80V	17.0	737	35 x 27 x 75	590
101-11012	VR5-8	5	ADVA-S148	R-15B	230/3	80V	17.0	737	35 x 27 x 75	590
101-40780	VR7F-8	7.5	ADVA-S168	R-15B	208/1	80V	22.3	949	35 x 27 x 75	630
101-40781	VR7F-8	7.5	ADVA-S13	R-15B	230/1	80V	22.3	949	35 x 27 x 75	630
101-40782	VR7F-8	7.5	ADVA-S17	R-15B	208/3	80V	22.3	949	35 x 27 x 75	630
101-40783	VR7F-8	7.5	ADVA-S15	R-15B	230/3	80V	22.3	949	35 x 27 x 75	630
101-41012	VR10-12	10	ADVA-S21	R-30D	208/3	120V	33.8	718	43 x 30 x 81	895
101-41112	VR10-12	10	ADVA-S19	R-30D	230/3	120V	33.8	718	43 x 30 x 81	895
101-42112	HR10-12	10	ADVA-S25	R-30D	208/3	120H	33.8	718	71 x 32 x 55	895
101-44112	HR10-12	10	ADVA-S23	R-30D	230/3	120H	33.8	718	71 x 32 x 55	895
101-41512	HR15-12	15	ADVA-S33	R-40A	208/3	120H	54.1	776	73 x 36 x 62	1210
101-42512	HR15-12	15	ADVA-S31	R-40A	230/3	120H	54.1	776	73 x 36 x 62	1210
101-43512	HR25-12	25	ADVA-S37	R-70A	208/3	120H	90.7	776	74 x 36 x 65	1557
101-44512	HR25-12	25	ADVA-S35	R-70A	230/3	120H	90.7	776	74 x 36 x 65	1557

<sup>\*</sup> V: Vertical, H: Horizontal Configuration



## Advantage Series (cont.)



### **DUPLEX AIR COMPRESSORS**

#### **FULLY PACKAGED COMPRESSORS:**

Compressors equipped with all of the desired options such as Mounted Magnetic Starter, Low Oil Level Monitor, Automatic Tank Drain, Air-Cooled Aftercooler and Vibration Isolators.

#### **DUPLEX FULLY PACKAGED COMPRESSORS:**

Two (2) Compressors and accessories supplied in one package provides the flexibility of single operations, alternating between compressors, or duplex operations to meet high air demands • INCLUDES: Automatic Tank Drain, Vibration Isolators, Two (2) Mounted Magnetic Starters plus alternator, Low Oil Level Monitors and Air Cooled Aftercoolers.



#### **CHAMPION PREMIUM EXTENDED WARRANTY KITS:**



ASCOT NO.	MFG. NO.	DESCRIPTION							
CHAMPION PREMIUM EXTENDED WARRANTY KITS									
106-30613	300CAP6013	Champion 6-Year Premium Extended Warranty Kit w Synthetic Oil For Compressors That Utilize the Champion R-15 pump							
106-34613	304CAP6013	Champion 6-Year Premium Extended Warranty Kit w Synthetic Oil For Compressors That Utilize the Champion R-30 pump							
106-36613	306CAP6013	Champion 6-Year Premium Extended Warranty Kit w Synthetic Oil For Compressors That Utilize the Champion R-40 pump							
106-38613	308CAP6013	Champion 6-Year Premium Extended Warranty Kit w Synthetic Oil For Compressors That Utilize the Champion R-70 pump							

6-year premium warranty kits for all Advantage Series compressor packages that utilize R-Series pumps. When purchasing one of these compressor packages, simply order the premium warranty kit that corresponds with the correct package, register your compressor and receive an additional 3 years of warranty protection on your compressor pump. These kits include enough service items for 6 oil and filter changes. The kits will utilize their Champlub synthetic oil.

ASCOT NO.	MFG. NO.	HP	VOLTAGE/PHASE	TANK SIZE	TANK CONFIG.	PUMP MFG. NO.	ACFM @175 PSIG	ACAC
101-51120	HR5D-12	5	230/1	120	Horiz.	R-15B	34.6	STD
101-53120	HR5D-12	5	208/3	120	Horiz.	R-15B	34.6	STD
101-54120	HR5D-12	5	230/3	120	Horiz.	R-15B	34.6	STD
101-75120	HR7D-12	7.5	230/1	120	Horiz.	R-30D	51.6	STD
101-75320	HR7D-12	7.5	208/3	120	Horiz.	R-30D	51.6	STD
101-75420	HR7D-12	7.5	230/3	120	Horiz.	R-30D	51.6	STD
101-10325	HR10D-25	10	230/3	250	Horiz	R-30D	69.6	STD





## **CHAMPION GASOLINE** AIR COMPRESSORS

■ Truck Bed Mountable, ideal for Field Service Applications ■ Heavy Duty Two-Stage Compressors ■ V-Belt Drive with Totally Enclosed Belt Guard • Centrifugal unloader for loadless start prolongs motor life • Gasketless Design ■ Vibration Isolators Included on 30 gallon models • Each new assembled unit comes with a three-year standard warranty, six-year extended warranty

ASCOT NO.	MFG. NO.	DESCRIPTION
-----------	----------	-------------

KITS									
106-37831	CC1137831	KOHLER KIT: Maintenance Kit for 14HP Kohler Engine Gasoline Air Compressor. Includes: Pre-filter, air filter, spark plug, fuel filter, engine oil, Champion air filter and compressor oil							
106-37832	CC1137832	HONDA KIT: Maintenance Kit for 13HP Honda Engine Gasoline Air Compressor. Includes: Air filter, spark plug, engine oil, Champion air fliter and compressor oil							





ASCOT NO.	MFG. NO.	HP OR HPD	TANK SIZE	TANK CONFIG.	ENGINE TYPE	ACFM @175 PSIG	RPM	APPROX. SHIP WEIGHT (LBS.)
102-11530	HGR7-3H	13	30	Horiz.	Honda	23.2	1025	434
102-11560	HGR7-6H	13	60	Horiz.	Honda	23.2	1025	500
102-11880	HGR7-8H	13	80	Horiz.	Honda	23.2	1025	539
102-13730	HGR7-3K	14	30	Horiz.	Kohler	23.2	1025	434
102-13760	HGR7-6K	14	60	Horiz.	Kohler	23.2	1025	500
102-13780	HGR7-8K	14	80	Horiz.	Kohler	23.2	1025	539

Please contact us for more information regarding **Champion Air Compressors** 





## **RV** Series

## **RV-SERIES RECIPROCATING** AIR COMPRESSORS

■ Two-stage, splash lubricated compressor pump

■ 5 - 15 HP ■ Up to 175 PSIG ■ 17.3 - 49 ACFM at 175 PSIG rating Tank mounted, vertical or horizontal configuration

■ Automatic start/stop operation ■ Factory filled with ChampLub AC lubricant ■ Mounted Magnetic Starters standard on all Centurion II models (Except for 5 HP models with 3450 RPM motors)



					12	5 PSI RAT	ING*	175	PSI RAT	ING*		
ASCOT NO.	MFG. NO.	НР	TANK SIZE	PUMP MFG NO.	RPM	CFM DISPL.	RATING CFM DEL'Y	RPM	CFM DISPL.	RATING CFM DEL'Y	DIMENSIONS (LXWXH)	APPROX. SHIP WT. (LBS.)
101-65801	VRV5-8	**5	80	RV-15A	805	23.5	17.3	715	20.8	16.5	33" x 26-5/8" x 76"	530
101-67581	VRV7F-8	**7.5	80	RV-15A	990	28.7	23.1	975	28.6	22.1	33" x 26-5/8" x 76"	595
101-67514	HRV7-12	7.5	120	RV-30A	670	39.6	25.8	570	31.9	24.0	72.5" x 24" x 54"	820
101-67583	VRV7-8	7.5	80	RV-15A	670	39.6	25.8	570	31.9	24.0	33" x 26-5/8" x 76"	595
101-67515	VRV7-12	7.5	120	RV-30A	670	39.6	25.8	570	31.9	24.0	42.5" x 30" x 79"	820
101-61212	HRV10-12	10	120	RV-30A	810	47.3	34.8	699	40.7	32	72.5" x 24" x 54"	890
101-61081	VRV10-8	10	80	RV-30A	810	47.3	34.8	699	40.7	32	42.5" x 30" x 66.75"	675
101-61012	VRV10-12	10	120	RV-30A	810	47.3	34.8	699	40.7	32	42.5" x 30" x 79.75"	910
101-61512	HRV15F-12	15	120	RV-30A	1045	60.9	49	1020	59.5	46.8	72.5" x 24" x 54"	960
101-61513	VRV15F-12	15	120	RV-30A	1045	60.9	49	1020	59.5	46.8	46-3/8" x 30" x 79.75"	980

\*Units tested in accordance with CAGI/PNEUROP Acceptance Test Code PH2CPTC2 \*\*Available with either 1750 or 3450 RPM. Starter not required for 5HP 3450RPM motor. Starter required for 7.5HP 3450RPM motor.



## Centurion



## **CENTURION II | 13 HP** RECIPROCATING COMPRESSOR/GENERATOR

■ Two-stage splash lubricated RV15A compressor pump

■ Honda GX390 engine with electric start ■ Industrial 4000-watt generator with (2) 120V, 15 amp and (1) 240V, 20 amp receptacles • Twin 4-gallon horizontal air receiver tanks ■ Manual receiver drain valve ■ Lifting hook ■ Belt drive with totally enclosed belt guard ■ Gas pilot valve

■ Comprehensive base plate ■ INCLUDES: (2) Pressure gauges - the left gauge indicates tank pressure and the right gauge indicates output pressure; adjustable pressure regulator; pressure relief valve, air socket

GAS									1	75 PSI RAT	ING*		APPROX.
ASCOT NO.	MFG. NO.	PART. NO.	ENGINE MODEL	НР	TANK CAP. (GAL)	PUMP MFG NO.	CONTINUOUS GENERATOR WITH COMP OFF-LOAD	MAX. AC OUTPUT	RPM	CFM DISPL.	RATING CFM DEL'Y	DIMENSIONS (LXWXH)	SHIP WEIGHT (LBS.)
101-73904	HGRV7-LPH-G	CC1153480	HONDA GX390	13	(2) 4	RV-15A	3500 watts	4000 watts	784	22.9	17.9	46" x 22" x 35"	490

## **Evolution**

## **EVOLUTION: QUIET ENCLOSED RECIPROCATING** AIR COMPRESSORS

- Sound levels as low as 67dBA 12-gauge steel enclosure
- Separate compressor and motor chambers with dedicated cooling circuits provide cooler operation and long-life
- Separate inner base reduces vibration and noise Oil-site gauge and filter maintenance indicator provide notification of routine maintenance ■ Innovative Belt-tensioning system



ASCOT NO.	MFG. NO.	НР	TANK CONFIG.	TANK CAP. (GAL.)	PUMP MFG. Number	RPM	APPROX. SHIP WEIGHT (LBS.)
101-58000	HER5-8	5	Horiz.	80	RP-15B	734	733 Lbs.
101-78000	HER7F-8	7.5	Horiz.	80	RP-15B	990	762 Lbs.



#### CHAMPION MAINTENANCE PARTS



ASCOT NO.	MFG. NO.	DESCRIPTION
106-28530	M2853	Pilot Unleader Valve for Gas Compressors
106-89090	P08909A	Champion Oil, 1-Gallon
106-94730	P09479A	Champion Oil, 1-Quart
117-05050	P05050A	Filter Element for Gas and Small Electric Units
117-05051	P05051A	Filter Element for Large Electric Units
106-11882	Z11882	Compressor Service Kit for RV-15/R-15 Pump INCLUDES: Lubricant, Air Filters & Oil Filter
106-11883	Z11883	Compressor Service Kit for RV-30/R-30 Pump INCLUDES: Lubricant, Air Filters & Oil Filter
106-11884	Z11884	Compressor Service Kit for R-40 Pump INCLUDES: Lubricant, Air Filters & Oil Filter
106-13194	CC1031194	Engine Maintenance Kit for 13 HP Gas Compressors
106-00519	M519C	Replacement 1/4 NPT Gauge for Compressors

### CHAMPION VOLTAGE **CONVERSION KITS**

If 460V, 3 phase service is needed voltage conversion kits are available



ASCOT NO.	MFG. NO.	DESCRIPTION
106-11727	TEN011727	Voltage Conversion Kit, Simplex – 5HP and 7.5HP from 230V/3 Phase to 460V/3 Phase
106-11728	TEN011728	Voltage Conversion Kit, Simplex – 10HP from 230V/3 Phase to 460V/3 Phase
106-11729	TEN011729	Voltage Conversion Kit, Simplex – 15HP from 230V/3 Phase to 460V/3 Phase
106-11730	TEN011730	Voltage Conversion Kit, Simplex – 25HP from 230V/3 Phase to 460V/3 Phase



## L-SERIES

## **Rotary Screw Air Compressors**

The Champion L-Series Rotary Screw Compressors are highly competitive, expertly-designed packages that use the latest design techniques to give you industry-leading reliability, performance, and value. When used in 100% duty cycle applications, Rotary Screw compressors from Champion are a great, quiet alternative to a reciprocating compressor.

#### **STANDARD FEATURES:**

- Advanced but simple package design lowering maintenance and service costs and lengthening service life
- Belt-driven


AIR SYSTEMS // AIR COMPRESSORS & DRYERS

- Integrated Airends ensure superior serviceability
- Available in fixed and variable speed
- State-of-the-art dual position pilot controller
- High-quality, sound -insulating enclosure panels
- Low-noise, thermostaticallycontrolled, motor-driven fan
- Tank or basemount with optional dryer configurations (AirStation)
- Zero air-loss auto tank drain on Air Station
- L- SERIES WARRANTY: Standard one-year warranty on package, premium tenyear warranty available











## **CHAMPION L-SERIES ROTARY SCREW AIR COMPRESSORS**

		DRIVE	MOTOR		NOMINAL	PRESSURE	NOISE LEVEL	BASE MOU	INT	
ASCOT NO.	MFG. NO.	HP	KW	VOLTAGES AVAILABLE	PSIG	ACFM	DB(A)	DIMENSIONS (LXWXH)	WEIGHT (LBS.)	
				230 1 phase	100	19.4				
101-45231	L04	5	4	208-230/460/575 3 PH	125	18.4	68		373	
				_	190	14.0		26" 24" 77"		
				230 1 phase	100	26" x 24"		26" x 24" x 37"		
101-57523	L05	7.5	5	208-230/460/575 3 PH	125	20.7	68		373	
				_	190 16.4					
					100	45.9				
101-71023	L07	10	7	208-230/460/575 3 PH	125	37.4			452	
					190	30.0				
					100	66.0	71	27" x 25" x 41"		
101-11153	L11	15	11	208-230/460/575 3 PH	125	56.8	1		483	
					190	46.6				
					100	95.31				
101-15203	L15	20	15	208-230/460/575 3 PH	125	79.8	73		739	
	-				190	63.5				
					100	114.7				
101-18253	L18	25	18	208-230/460/575 3 PH	125	96.7		31" x 28" x 47"	796	
					190	82.6				
					100	128.8	74			
101-22303	L22	30	22	208-230/460/575 3 PH	125	113.3			810	
					190	92.1				
					100	146.8				
101-23303	L23	30	22	208-230/460/575 3 PH	125	121.8	68		1433	
					190	105.2				
					100	170.9				
101-26353	L26	35	26	208-230/460/575 3 PH	125	145.8	69	53" x 35" x 64"	1493	
					190	121.4				
					100	194.9				
101-29403	L29	40	29	208-230/460/575 3 PH	125	169.8	71		1501	
		-			190	145.4	1			

#### AIR STATION SPECIFICATIONS, 60 HZ

120

R134A

					WEIGHT (LBS.) DIMENSIONS (LXWXH)								
ASCOT NO.	MFG. NO.	DRYER Model	RECEIVER SIZE (GALLONS)	REFRIGERANT	80 GAL.	120 (	GAL.	240 GAL.	80 GAL.	120 G	AL.	240 GAL.	
105-00425	L04	CRN25	80, 120, 240		LESS DRYER	LESS D		LESS DRYER	LESS DRYER	LESS D		LESS DRYER	
105-00535	L05	CRN35	80, 120, 240	R134A	791 <b>WITH DRYER</b> 877	87 WITH E 96	DRYER	1226 WITH DRYER 1312	52 x 32 x 68 WITH DRYER 63 x 32 x 68	73 x 32 WITH D 72 x 32	RYER	90 x 37 x 74 WITH DRYER 88 x 37 x 73.8	
105-00750	L07	CRN50	00 120		LESS DRYER 882	LESS D			LESS DRYER 52 x 32 x 68	<b>LESS D</b> 73 x 32			
105-01175	L11	CRN75	80, 120		<b>LESS DRYER</b> 853 (387)	936 (			WITH DRYER 63 x 32 x 68	WITH D 72 x 32			
					120 GAL. ONLY								
105-01590	L15	CRN100 CES90			LESS DRY 1194 (542		WIT	H RNC DRYER 1505					
105-19125	110	CRN125	120	D17.// A	LESS DRY	ER	WIT	H RNC DRYER	LESS DRYI	R	W	ITH DRYER	

1251 (567)

LESS DRYER 1265



L18

L22

CES120

CRN150 CES140

73 x 32 x 74

1584 (719)

WITH RNC DRYER

1604

80 x 32 x 74

105-18125

105-22150

## LV/LVR-Series

## **Rotary Vane Air Compressors**

The LV Series range of compressors is engineered to meet the most stringent of specifications. Their compact, simple, robust and integrated design allows them to fit anywhere undercover. They are easy to install and maintain as well as extremely quiet. The LV Series is available in either tripod or tank mounted versions. They are designed for a wide variety of applications including automobile, car body shops, wood working, dentistry, laundry, packaging and machine tools.



- 2-10 hp Less than 3 ppm oil carryover ■ Available as a Simplex or Duplex tank *mounted unit* ■ Standard starter • SLOW SPEED: 1760 RPM • 100% duty cycle
- Continuous run or start/stop ■ TEFC motor
- Direct drive Standard 2 Year Warranty





CHAMPION

LV-SERIES

LV-Series: Simplex

### LV SERIES: SIMPLEX

ASCOT NO.	MFG. NO.	НР	KW	VOLTAGE/PHASE	MOUNT. CONFIG.	TANK STYLE	TANK CAP. (GAL.)	CFM 100 PSIG	CFM 150 PSIG	NOISE LEVEL (DBA)	AIR OUTLET NPT	OIL CAP. (GAL.)	WT. (LBS.)	DIMENSIONS (LXWXH)	STARTER	AFTER COOLER
104-01201	LV01PUTS	2	1	115/208-230 1 Ph 208-230/460 3 Ph	Tripod	N/A	N/A	6.3	4.5	65	3/8"	0.5	130	30" x 11" x 18"	Yes	Yes
104-01202	LV01PURHS-3	2	1	115/208-230 1 Ph 208-230/460 3 Ph	Tank	Horiz.	30	6.3	4.5	65	3/8"	0.5	240	41" x 19" x 34"	Yes	Yes
104-04501	LV04PUTAS	5	4	208-230 1 Ph 208-230/460 3 Ph	Tripod	N/A	N/A	19.5	16	72	1/2"	0.5	315	42" x 24" x 24"	Yes	Yes
104-04502	LV04PURVS-8	5	4	208-230 1 Ph 208-230/460 3 Ph	Tank	Vert.	80	19.5	16	72	1/2"	0.5	570	36" x 26" x 66"	Yes	Yes
104-04503	LV04PURHS-8	5	4	208-230 1 Ph 208-230/460 3 Ph	Tank	Horiz.	80	-	16	72	1/2"	0.5	425	65" x 22" x 40"	Yes	Yes
104-05750	LVR08PURVS-8	7.5	5.5	208-230 1 Ph 208-230/460 3 Ph	Tank	Vert.	80	-	22	72	1/2"	1.15	695	39" x 26" x 69"	Yes	Yes
104-05751	LVR05PURHS-8	7.5	5.5	208-230 1 Ph 208-230/460 3 Ph	Tank	Horiz.	80	-	22	72	1/2"	1.15	550	66" x 22" x 43"	Yes	Yes
104-07101	LVR07PURHS-8	10	7.5	208-230/460 3 Ph	Tank	Horiz.	80	-	28.9	72	3/4"	1.15	670	66" x 22" x 43"	Yes	Yes

### LV SERIES: DUPLEX

ASCOT NO.	MFG. NO.	НР	KW	VOLTAGE/PHASE	MOUNT. CONFIG.	TANK STYLE	TANK CAP. (GAL.)	CFM 100 PSIG	CFM 150 PSIG	NOISE LEVEL (DBA)	AIR OUTLET NPT	OIL CAP. (GAL.)	WT. (LBS.)	DIMENSIONS (LXWXH)	STARTER	AFTER COOLER
104-04120	LV04PDRHS-12	5	4	208-230 1 Ph 208-230/460 3 Ph	Tank	Horiz.	120	39	32	75	1/2"	1	845	72" x 27" x 48"	Yes	Yes
104-05127	LVR05PDRHS-12	7.5	5.5	208-230 1 Ph 208-230/460 3 Ph	Tank	Horiz.	120	-	44	76	1/2"	1	1210	76" x 27" x 50"	Yes	Yes
104-07121	LVR07PDRHS-12	10	7.5	208-230 1 Ph 208-230/460 3 Ph	Tank	Horiz.	120	-	57.8	77	3/4"	1	1325	76" x 27" x 50"	Yes	Yes

Refrigerated Air Dryers

## Refrigerated Air Dryers

#### SIZING A 3-IN-1 HIGH INLET DRYER

Follow the steps below to size your dryer:

- Use the table below that identifies your inlet temperature to your dryer.
- In the chart select the inlet pressure that will be entering your dryer.
- 3 Determine SCFM to compensate for air line leaks and pressure drops.

#### **RULE OF THUMB CALCULATION**

**ROTARY SCREW AIR COMPRESSOR** 

SCFM = Compressor HP x 4.5

RECIPROCATING AIR COMPRESSOR

SCFM = Compressor HP x 3.5

Select the SCFM requirement for your dryer based on the SCFM coming out the air compressor.

**EXAMPLE:** What size dryer should be used? Customer has a 20 HP reciprocating compressor. The inlet temperature to the dryer is approximately 120°F. The pressure entering the dryer is 140 PSI.

- Identify the table that shows 120°F (in this example it would be table 3).
- 2 From the same table (table 3) select the inlet pressure of dryer. In this example (140 PSI).
- 3 Use Rule of Thumb Calculation to determine SCFM.  $20HP \times 3.5 = 70 SCFM$
- Locate 70 SCFM under 140 PSI column. Follow across to dryer part number.

ANSWER: Customer needs part number 3530.

#### **REFRIGERATED AIR DRYERS - SPECIAL FEATURES:**

- Effective moisture removal at all flow rates
- Combination separator/filter
- Ideal for air compressors equipped with an air cooled aftercooler



ASCOT NO.	MFG. NO.	FLOW	VOLTAGE	IN/OUT CONNECT.	SIZE (LXWXH)	APPROX. SHIP WEIGHT (LBS.)
105-00015	CRN15	15	115/1/60	3/8" OD	15x12.6x12.6	69 Lbs.
105-00025	CRN25	25	115/1/60	1/2" NPT	26x19x21	142 Lbs.
105-00035	CRN35A1	35	115 or 230/1/60	1/2" NPT	26x19x21	146 Lbs.
105-00050	CRN50A1	50	115 or 230/1/60	1/2" NPT	26x19x21	152 Lbs.
105-00075	CRN75A1	75	115 or 230/1/60	3/4" NPT	33x25x26	209 Lbs.
105-00100	CRN100A1	100	115 or 230/1/60	1" NPT	38x29x20	251 Lbs.
105-00125	CRN125A1	125	115 or 230/1/60	1" NPT	38x29x20	273 Lbs.
105-00150	CRN150A1	150	115 or 230/1/60	1" NPT	38x29x20	279 Lbs.

#### CHAMPION CRH SERIES HIGH INLET TEMPERATURE REFRIGERATED AIR DRYER

MFG. NO.	100 PSIG	150 PSIG	175 PSIG								
	TABLE 1: 180° INLET										
CRH20	18	22	23								
CRH25	23	27	29								
CRH35	32	38	41								
CRH50	45	54	58								
CRH75	68	81	87								
CRH100	91	108	116								
CRH125	114	135	145								

MFG. NO.	100 PSIG	150 PSIG	175 PSIG						
TABLE 2: 150° INLET									
CRH20	21	25	26						
CRH25	26	31	33						
CRH35	37	44	47						
CRH50	52	62	67						
CRH75	78	93	100						
CRH100	105	124	133						
CRH125	131	155	167						

MFG. NO.	100 PSIG	150 PSIG	175 PSIG
	TABLE 3: 1	20° INLET	
CRH20	23	29	30
CRH25	30	35	38
CRH35	42	49	53
CRH50	59	70	75
CRH75	88	105	113
CRH100	118	140	151
CRH125	148	176	189



## 28 AIR SYSTEMS // AIR COMPRESSORS & DRYERS

Air Compressors

## **C-Aire** Compressors

## **C-AIRE SIMPLEX COMPRESSORS**

Oversized after coolers remove over 60% of water vapor, humidity or moisture - Large displacement 3-cylinder pumps run slower thus increasing the longevity and contributes to them being quieter • ALL UNITS INCLUDE: Ball valve, tank drain, oil drain tube, full synthetic oil, large sight glass and liquid fill gauge ■ Installation kit only included with Fully Packaged units (4 mounting pads, 4 anchor bolts, 12" steel braided flex hose)









ASCOT NO.	MFG. NO.	HP	STAGE	CFM @175 PSIG	PUMP	PUMP RPM	MAIN BEARINGS	OIL	VOLTS	AMPS	MOTOR RPM	BREAKER SIZE	TANK SIZE (GAL.)	DIMENSIONS (LXWXH)	WT. (LBS.)
101-50080	A050V080-1230	5	2	17	2 Cylinder Cast Iron	885	50,000 Hours	Full Synthetic	208/230, 1 Phase	21@208V, 19.1@230V	1745	40 Amp	80	35" x 24" x 70"	515
101-75080	A075V080-1230	7.5	2	24	3 Cylinder Cast Iron	649	50,000 Hours	Full Synthetic	208/230, 1 Phase	33.3@208V, 31.3@230V	1760	50 Amp	80	34" x 24" x 73"	625

## **C-AIRE GAS ENGINE COMPRESSOR**

Two-Stage compressor that is just the right size for a service truck using a 1" or 3/4" impact wrench and is great for farm service use • INCLUDES: Ball valve, Honda engine, electric start, engine idle down, oil drain tube, tank drain, large displacement 3 cylinder pumps, large oil sight glass, liquid filled gauge, full synthetic oil & mounting pads





ASCOT NO.	MFG. NO.	HP	STAGE	CFM @175 PSIG	PUMP	PUMP RPM	MAIN BEARINGS	OIL	MOTOR RPM	TANK SIZE (GAL.)	DIMENSIONS (LXWXH)	WT. (LBS.)
102-13030	A130H030-G	13	2	26	3 Cylinder Cast Iron	745	50,000 Hours	Full Synthetic	800	30	42" x 17" x 45"	474



## Ingersoll Rand **Air Compressors**



## TWO-STAGE ELECTRIC "VALUE PACKAGE"

- Priced right and designed for the most demanding applications where a dependable air supply is required
- EACH PACKAGE INCLUDES: A two-stage cast iron compressor pump, ODP electric motor, magnetic motor starter (mounted and wired), automatic start and stop pressure switch control, mounted on an ASME rated receiver tank • Available voltages: 230/1/60 (5-7.5 HP), 200/3/60, 460/3/60 ■ Pressure up to 175 PSIG
- Oil sight glass included on 10-15 HP Packages

ASCOT NO.	MFG. NO.	HP	ACFM @175 PSIG	TANK
101-23451	2340L5-V	5	14.7	60 Gallon Vertical
101-24705	2475N5-V	5	16.8	80 Gallon Vertical
101-24751	2475N7.5-V	7.5	24	80 Gallon Vertical
101-25452	2545E10-V	10	35	120 Gallon Horizontal
101-71150	7100E15-V	15	50	120 Gallon Horizontal

## TWO-STAGE GASOLINE **ENGINE DRIVEN**

Ideal for fleet or field service applications with truck bed mounting design ■ Idle engine control and electronic ignition for easier starting • Powder coat paint finish to protect against outdoor elements ■ 30-gallon ASME receiver and OSHA fully enclosed belt guard for worker safety

ASCOT NO.	MFG. NO.	НР	ENGINE	ACFM @175 PSIG	TANK
102-24125	2475F14G	14	Kohler	25	30 Gallon Horizontal
102-24212	2475F13.GH	13	Honda	25	30 Gallon Horizontal







## Ingersoll Rand Air Compressors (cont.)



## TWO-STAGE ELECTRIC "FULLY PACKAGED"

• Everything you need for a dependable air supply with minimal maintenance - FULLY PACKAGED COMPRESSORS INCLUDE:

Magnetic motor starter, air cooler and electric drain valve which removes harmful moisture, plus, the added protection of a low oil level shutdown switch • AVAILABLE VOLTAGES: 230/1/60 (5-7.5 HP), 200/3/60, 460/3/60



ASCOT NO	. MFG. NO.	HP	ACFM @175 PSIG	TANK
101-27550	2475N5-P	5	16.8	80 Gallon Vertical
101-27551	2475N7.5-P	7.5	24	80 Gallon Vertical
101-27552	2545K10-P	10	35	120 Gallon Vertical
101-27553	2545E10-P	10	35	120 Gallon Horizontal
101-71153	7100E15-P	15	50	120 Gallon Horizontal

### INGERSOLL-RAND START-UP MAINTENANCE KITS

■ All the parts needed to maintain your compressor for a full year, plus the added protection of extended warranty coverage are two very distinct advantages you'll gain with the All Season Select synthetic pump lubricant and replacement air filter elements

• Kits for gasoline engine driven compressors also include engine air filter, oil filter and engine oil



ASCOT NO.	MFG. NO.	DESCRIPTION
106-24305	32305880	Ingersoll Rand 2340/2475 Electric Air Compressor Start Up Kit
106-24710	32305898	Ingersoll Rand 2545/7100 Electric Air Compressor Start Up Kit
106-30020	32305906	Ingersoll Rand 15ST Electric Air Compressor Start Up Kit
106-24712	32305872	Ingersoll Rand 2475F12.5G Kohler Gas Compressor Start Up Kit

Call for more information on Ingersoll Rand Air Compressors



**Rotary Screw** Compressors



- Engineered for high performance, efficiency and reliability, Chicago Pneumatic's new line of QRS rotary screw air compressors meets the compressed air requirements of the most demanding shops, providing a complete compressed air installation
- The compressor and dryer, when included, is tank mounted, prepiped, wired and tested. All air connections have been optimized to minimize pressure drop and reduce the potential for air leaks
- Low sound enclosure and innovative cooling fan, the CP QRS series offers the lowest noise levels available, allowing you to install it virtually anywhere in the shop
- Combined with efficient rotary screw technology and a high efficiency TEFC (Totally Enclosed Fan Cooled) motor, the QRS offers low energy consumption. Pulse free air is ideal for paint and body applications
- Simple compression concept and continuous contact cooling, the QRS rotary screw compressor can operate fully loaded 24 hours a day, 7 days a week. All reciprocating compressors are designed to cycle for intermittent operation



- The CP QRS offers increased reliability, reduced maintenance and trouble-free operation. No need to worry about rings, valves, rod inserts, bushings and pistons. Extended service intervals save time and money. Convenient service panel allows easy access to all internal components
- The QRS oil cooling system, A-T-L starter, TEFC motor, optional air dryer, low sound enclosure and receiver tank are all factory assembled and tested
- Can easily be installed just about anywhere in the shop. Its integrated design provides clean, cool, dry, quality air that protects your air tools, shop equipment and body work from harmful moisture, dirt and heat
- QRS 3.0. 5.0 & 7.5 are available 1/60/220V
- All QRS are available with tri-voltage motors and starters for 3/60/208-230-460V
- QRS 20-30 are also available as base mounted

ASCOT NO.	MFG. NO.	НР	PART NO.	TANK (GAL.)	ELECTRICS (V/PH.)	CFM 125	CFM 150	DIMENSIONS (LXWXH)	SHIP WEIGHT (LBS.)
				5	НР				
101-50001	QRS5.0HP	5	4152010187	60H	208-230/460/3	N/A	16.6	57 x 24 x 50	457
101-50000	QRS5.0HPD	5	4152010193	60H	208-230/460/3	N/A	16.6	57 x 24 x 50	531
101-50002	QRS5.0HP-1	5	4152010169	60H	208-230/1	N/A	16.6	57 x 24 x 50	457
101-50003	QRS5.0HPD-1	5	4152010175	60H	208-230/1	N/A	16.6	57 x 24 x 50	531
				7.	БНР				
101-75001	QRS7.5HP	7.5	4152010189	60H	208-230/1	23.0	21.2	57 x 24 x 50	468
101-75000	QRS7.5HPD	7.5	4152010195	60H	208-230/3	23.0	21.2	57 x 24 x 50	543
101-75002	QRS7.5HP-1	7.5	4152010171	60H	460/3	23.0	21.2	50 x 24 x 50	468
101-75003	QRS7.5HPD-1	7.5	4152010177	60H	208-230/1	27.0	21.2	50 x 24 x 50	543
				10	HP				
101-10001	QRS10HP-125	10	4152010529	132H	208-230/460/3	37.0	N/A	76 x 25 x 58	752
101-10002	QRS10HP-150	10	4152010530	132H	208-230/460/3	N/A	33.0	76 x 25 x 58	825
101-10000	QRS10HPD-125	10	4152010533	132H	208-230/460/3	37.0	N/A	76 x 25 x 58	752
101-10003	QRS10HPD-150	10	4152010534	132H	208-230/460/3	N/A	33.0	76 x 25 x 58	825
15HP									
101-15001	QRS15HP-125	15	4152010531	132H	208-230/460/3	52.0	N/A	76 x 25 x 58	778
101-15002	QRS15HP-150	15	4152010532	132H	208-230/460/3	N/A	47.0	76 x 25 x 58	856
101-15000	QRS15HPD-125	15	4152010535	132H	208-230/460/3	52.0	N/A	76 x 25 x 58	778
101-15003	QRS15HPD-150	15	4152010536	132H	208-230/460/3	N/A	47.0	76 x 25 x 58	856



## 32 AIR SYSTEMS // NITROGEN TIRE FILLING SYSTEMS

Purity Gauge, Valve Caps, Nitrogen Inflation Systems



### VALVE CAPS FOR NITROGEN INFLATED TIRES





Accurate and easy to use - Compact

DESCRIPTION

Nitrogen Purity Gauge

and ergonomic in design ■ Simple to operate, one button design • Battery

charge indicator ■ Auto-power off function • Replaceable battery and sensor ■ Auto diagnostic with error code to simplify troubleshooting

MFG. NO.

Nitro-1

ASCOT NO.

119-00011



468-00207

468-00307



468-00607





468-10100

468-59019



468-43607

	Please contact us	
y f	or more information	
	regarding Air	
j. 11	System products	
	CHAMPION	

ASCOT NO.	MFG. NO.	DESCRIPTION
468-00207	Cap PG	Green Plastic Nitrogen Cap
468-00307	TS-OR	Green Valve O-ring
468-00607	NITSLV	Nitrogen Sleeve
468-10100	VC10	Blue Plastic Nitrogen Caps (100/Box)
468-17492	17-492LG	Green Plastic Cap for Long Sleeve TPMS Snap-in Valves
468-20695	20695	Green Plastic Nitrogen Cap with Long Skirt for 20008 Snap-in TPMS Valve (100/Box)
468-26541	6541N-2	Dill Double Seal Cap with Green Sleeve
468-43607	436075	High Quality Green Stamped Chrome
468-59019	59-0019	Aluminum Nitrogen Valve Cap (100/Box)
468-59021	59-0021	Chrome Nitrogen Valve Cap (100/Box)

## HALTEC AIR & NITROGEN **INFLATION SYSTEM**

■ IDEAL FOR: Fleet Operations, Tire Service Centers and Auto Dealerships ■ 89TRL offers a mobile solution for single tire nitrogen inflation • The all-new nitrogen software will purge the air out of any tire size, re-inflate with nitrogen, maintaining its accuracy of .3 PSI • Designate the number of purge cycles to guarantee the purity level needed to obtain the benefits of nitrogen inflation over standard air inflation • Systems also work for standard air inflation



ASCOT NO. MFG. NO. 119-08914 89TRL-6

DESCRIPTION Haltec Air & Nitrogen Inflation System

Nitrogen Inflation Systems

## **Branick Nitrogen Inflation Systems**



### **BRANICK 130 NITROGEN** INFLATION SYSTEM

The MODEL 130 can be used with a nitrogen bottle or connected to a nitrogen generator to inflate up to 6 (4 hoses included) tires with high purity nitrogen. The integrated auto-inflator has a pressure range up to 145 psi and performs topoffs as well as automated nitrogen conversions, just set the pressure and the inflator does the rest. Branick equipment lasts and our Model 130 is no different, with all steel construction to take everyday use. The rechargeable battery has a visible charging indicator to let you know when you're ready to go. The mobility and features of the Model 130 make nitrogen service simple, fast and



ASCOT NO. 119-00130 130

MFG. NO.

119-00130

DESCRIPTION Branick 130 Nitrogen Inflation System

119-00485





### **BRANICK 485 NITROGEN** INFLATION SYSTEM

■ The 485 is totally automatic and completely mobile, enabling the operator to wheel the unit directly to any vehicle ■ Zero installation costs ■ No electrical requirements to operate ■ Industrial grade HD battery ■ Efficient membrane ■ Low maintenance cost ■ Connect to any air-line and you're inflating tires. Plug and Play!

ASCOT NO 119-00485

MFG. NO. 485

DESCRIPTION

Branick 485 Nitrogen Inflation System

### **BRANICK 500** NITROGEN TOWER INFLATION SYSTEM

Branick's tower systems are designed to be durable, easy to operate and efficient. On the inside are PRISM membranes with a 5 year warranty, whose 1.9:1 air input to nitrogen output ratio is the best in the industry. The top quality internal components include an auto shut-off to reduce compressor use. On the outside is an all steel shell for durability with easily accessible front mounted controls and simple to maintain filters, 5 years of free filters are included. Air input and nitrogen output pressure gauges give you performance at a glance. The inline nitrogen purity test port lets you verify that you're getting the purity you need for the job.

■ Best Air to Nitrogen Ratio on the Market at 1.9:1 ■ PRISM Membranes, the industries' best - Compressor

saving auto shut-off

■ Simple operation Adjustable

nitrogen and purity test port Air input/nitrogen output pressure gauges

Small footprint minimizes space



ASCOT NO. MFG. NO.

119-00500 500 DESCRIPTION Branick 500 Nitrogen Tower Inflation System



## 34 AIR SYSTEMS // AIR PREPARATION PRODUCTS

Air Preparation Accessories



117-05702



#### **ELECTRIC AUTOMATIC** COMPRESSOR DRAIN

 Automatically drains filters, compressor tanks. drip legs, aftercoolers and receivers • Opens and closes valve in 1 to 60 minute cycle times and 1

to 30 second blow down time • 1/4" NPT connection ■ Includes Y-strainer

MFG. NO. DESCRIPTION ASCOT NO.

117-05702 5702S Electric Automatic Compressor Drain

#### MINI IN-LINE DISPOSABLE **DESICCANT DRYER**

■ Point-of-use, patented, disposable, mini in-line desiccant dryer removes water vapor, oil vapor and dirt • Point-of-use on blow guns or spray guns as final protection for critical parts during blow off and paint spraying See-through housing shows desiccant bead color change from blue to pink indicating dryer

needs to be replaced ■ 1/4" NPT connection MFG. NO. DESCRIPTION QTY. ASCOT NO DFD-10 117-00010

Disposable Desiccant Dryer | 2



117-00010

#### **AUTOMATIC** COMPRESSOR DRAIN

 Automatically expels liquids from piping network in compressed air systems

Use in low spots in an air system where water accumulates • Float type drain features a protective stainless steel screen with umbrella baffle, providing large sump area for oil, sludge and dirt ■ 1/2" NPT top threaded port

ASCOT NO. MFG. NO. DESCRIPTION 117-05304 T53-04W Automatic Drain

#### **IN-LINE AIR TOOL FILTER**

■ In-line filter protects air tools from dirt and debris ■ 1-9/16" length, 1/2 oz. ■ 40 micron sintered bronze element ■ Inlet can be attached directly to pneumatic tools ■ 1/4" male x 1/4" female NPT

DESCRIPTION ASCOT NO. MFG. NO. 117-09132 9132 In-Line Air Tool Filter



117-05304



117-09132

#### HOW TO DETERMINE THE GALLONS OF WATER ACCUMULATED PER 8 HOURS OF USE

Follow the steps below to determine the gallons of water accumulated by a compressed air system per 8 hours of use:

- **Determine the ambient temperature** (outside temperature surrounding the dryer) and relative humidity.
- Locate ambient temperature in first column of water factor chart.
- **3** Follow the row over to percent of humidity. This indicates the number of gallons accumulated by your air compressor in an 8-hour period.

Ambient Air Temperature	20% Humidity	30% Humidity	40% Humidity	50% Humidity	60% Humidity	70% Humidity	80% Humidity	90% Humidity	100% Humidity
		(	ALLONS OF	WATER PER	8 HOURS @	100 SCFM			
120°F	18.6	27.9	37.2	46.5	55.8	65.1	74.4	83.7	93.0
110°F	14.1	21.0	27.9	35.1	42.0	48.9	55.8	63.0	69.9
100°F	10.5	15.6	20.7	26.1	31.2	36.6	41.7	46.8	52.2
90°F	7.8	11.4	15.3	19.2	23.1	26.7	30.6	34.5	38.4
80°F	5.7	8.4	11.1	13.8	16.8	19.5	22.2	24.9	27.9
70°F	3.9	6.0	7.8	9.9	12.0	13.8	15.9	18.0	19.8
60°F	2.7	4.2	5.7	6.9	8.4	9.9	11.1	12.6	14.1
50°F	2.1	3.0	3.9	4.8	6.0	6.9	7.8	8.7	9.9
40°F	1.2	2.1	2.7	3.3	3.9	4.8	5.4	6.0	6.6
30°F	.9	1.2	1.8	2.1	2.7	3.0	3.6	3.9	4.5
20°F	.6	.9	1.2	1.5	1.7	1.9	2.1	2.4	2.7
10°F	.3	.5	.7	.8	1.0	1.2	1.4	1.5	1.8

#### **EXAMPLE:**

25HP air compressor delivers 100 SCFM. Ambient Temp. = 100°F Relative Humidity = 60%

#### Water factor chart number is 31.2

Compressed air system accumulates 31.2 gallons of water per 8 hours of use.



Filters, Regulators & Lubricators

# Filters and Regulators

#### FILTER/REGULATOR **COMBINATION UNITS**

■ Combines filter and pressure regulator into one space saving unit ■ Output performance equal to an individual filter and regulator ■ Reduced pressure outputs of 0-125 PSIG • FEATURES THREE POSITION NON-RISING KNOB: push to lock, pull to adjust, detach to make tamper resistant • Available in metal bowl or polycarbonate bowl with metal bowl guard





114-75301

ASCOT NO.	MFG. NO.	PIPE SIZE	ADJUSTMENT Type	MAX. FLOW SCFM	BOWL CAPACITY	BOWL TYPE	DRAIN	GAUGE PART NO.	OPERATING TEMP.	MAX. PRESSURE
114-75200	B752T	1/4"	T-Handle	50	5 Oz.	Poly	Manual	117-01481*	40-125°F	150 PSIG
114-75201	B752WT	1/4"	T-Handle	50	6 Oz.	Metal	Manual	117-01481*	40-175°F	250 PSIG
114-75202	B752FW	1/4"	Knob	50	6 Oz.	Metal	Float Auto	117-01481*	40-125°F	175 PSIG
114-75203	B752Z	1/4"	Knob	50	5 Oz.	Poly	Piston Auto	117-01481*	40-125°F	150 PSIG
114-75300	B753T	3/8"	T-Handle	80	5 Oz.	Poly	Manual	117-01481*	40-125°F	150 PSIG
114-75301	B753WT	3/8"	T-Handle	80	6 Oz.	Metal	Manual	117-01481*	40-175°F	250 PSIG
114-75302	B753FW	3/8"	Knob	80	6 Oz.	Metal	Float Auto	117-01481*	40-125°F	175 PSIG
114-75303	B753Z	3/8"	Knob	80	5 Oz.	Poly	Piston Auto	117-01481*	40-125°F	150 PSIG
114-00754	B754GW	1/2"	Knob	100	6 Oz.	Metal	Manual	Included	40-175°F	250 PSIG
114-75400	B754T	1/2"	T-Handle	100	5 Oz.	Poly	Manual	117-01481*	40-125°F	150 PSIG
114-75401	B754WT	1/2"	T-Handle	100	6 Oz.	Metal	Manual	117-01481*	40-175°F	250 PSIG
114-75402	B754FW	1/2"	Knob	100	6 Oz.	Metal	Float Auto	117-01481*	40-125°F	175 PSIG
114-75403	B754Z	1/2"	Knob	100	5 Oz.	Poly	Piston Auto	117-01481*	40-125°F	150 PSIG

<sup>\*</sup>NOTE: Gauge not included. Sold separately. Ascot part number indicated.

#### **MODULAR UNITS**

• UNITS INCLUDE: A filter, regulator and lubricator and/or filter, regulator and oil removing filter ■ Units equipped with or without OSHA safety lock-out valves ■ Gauge included ■ Screwdriver only tool needed to connect or disconnect units Insert interlocking feature allows simple installation in any location



ASCOT NO.	MFG. NO.	PIPE SIZE	MAX. FLOW SCFM	BOWL CAPACITY	BOWL TYPE	DRAIN	LOCKOUT DRAIN	OPERATING TEMP.	MAX. PRESSURE
114-03352	C33352W	1/4"	100	6 Oz.	Metal	Manual	Not Included	40-175°F	250 PSIG
114-13352	VC33352W	1/4"	100	6 Oz.	Metal	Manual	Included	40-175°F	250 PSIG
114-03353	C33353W	3/8"	100	6 Oz.	Metal	Manual	Not Included	40-175°F	250 PSIG
114-13353	VC33353W	3/8"	100	6 Oz.	Metal	Manual	Included	40-175°F	250 PSIG
114-03354	C33354W	1/2"	100	6 Oz.	Metal	Manual	Not Included	40-175°F	250 PSIG
114-13354	VC33354W	1/2"	100	6 Oz.	Metal	Manual	Included	40-175°F	250 PSIG



## 36 AIR SYSTEMS // AIR PREPARATION PRODUCTS

## Filters, Regulators & Lubricators





#### **GENERAL PURPOSE FILTERS**

Removes harmful water condensate, pipe scale, dirt and rust from your compressed air system • Prevents corrosive damage to compressed air equipment and finished products • Protects components and air tools from premature failure ■ Installed upstream of regulators to prevent valve failure • Also used as pre-filters to oil removing and coalescing filters to ensure high efficiency and long element life in applications such as paint spraying, instrumentation and pharmaceuticals • Porous sintered bronze element







111-30002

111-35201

111-32908

ASCOT NO.	MFG. NO.	PIPE SIZE	MAX. FLOW SCFM	BOWL CAPACITY	BOWL TYPE	DRAIN	OPERATING TEMP.	MAX. PRESSURE	FILTER Element
111-30002	F300-02	1/4"	27	1 Oz.	Poly	Manual	40°-125°F	150 PSIG	20 micron
111-35200	F352	1/4"	48	5 Oz.	Poly	Manual	40°-125°F	150 PSIG	40 micron
111-35201	F352W	1/4"	48	6 Oz.	Metal	Manual	40°-160°F	250 PSIG	40 micron
111-35202	F352Z	1/4"	48	5 Oz.	Poly	Piston Auto	40°-125°F	150 PSIG	40 micron
111-35203	F352FW	1/4"	48	6 Oz.	Metal	Float Auto	40°-120°F	175 PSIG	40 micron
111-35300	F353	3/8"	75	5 Oz.	Poly	Manual	40°-125°F	150 PSIG	40 micron
111-35301	F353W	3/8"	75	5 Oz.	Metal	Manual	40°-160°F	250 PSIG	40 micron
111-35302	F353Z	3/8"	75	6 Oz.	Poly	Piston Auto	40°-125°F	150 PSIG	40 micron
111-35303	F353FW	3/8"	75	6 Oz.	Metal	Float Auto	40°-120°F	175 PSIG	40 micron
111-35400	F354	1/2"	100	5 Oz.	Poly	Manual	40°-125°F	150 PSIG	40 micron
111-35401	F354W	1/2"	100	6 Oz.	Metal	Manual	40°-160°F	250 PSIG	40 micron
111-35402	F354Z	1/2"	100	5 Oz.	Poly	Piston Auto	40°-125°F	150 PSIG	40 micron
111-35403	F354FW	1/2"	100	6 Oz.	Metal	Float Auto	40°-120°F	175 PSIG	40 micron
111-37600	F376W	3/4"	230	10 Oz.	Metal	Manual	40°-160°F	250 PSIG	40 micron
111-37601	F376FW	3/4"	230	10 Oz.	Metal	Float Auto	40°-120°F	175 PSIG	40 micron
111-32908	F329-08	1"	300	29 Oz.	Metal	Manual	40°-160°F	250 PSIG	40 micron
111-32910	F329-10W	1-1/4"	400	29 oz.	Metal	Manual	40°-160°F	250 PSIG	40 micron
111-32912	F329-12W	1-1/2"	425	29 oz.	Metal	Manual	40°-160°F	250 PSIG	40 micron

#### COALESCING/OIL REMOVING FILTERS

Removes submicron particles, particularly oil APPLICATIONS **INCLUDE:** Paint spraying, pneumatic control instrumentation, printing and protection of air bearings • For maximum efficiency, a pre-filter needs be to installed upstream of oilremoving filter ■ Bonded end seals eliminate aerosol leakage past the element • Inner and outer support ribs are chemical resistant and strengthen element structure • Drain layers allow filtered elements to drop to bottom of filter with barrier to prevent reentry of drops to downstream air





ASCOT NO.	MFG. NO.	PIPE SIZE	MAX. FLOW SCFM	BOWL CAPACITY	BOWL TYPE	DRAIN	OPERATING TEMP.	MAX. PRESSURE	FILTER Element
115-55200	F552FW	1/4"	24	6 Oz.	Metal	Float Auto	40°-120°F	175 PSIG	.03 micron
115-55201	F552W	1/4"	24	6 Oz.	Metal	Manual	40°-160°F	250 PSIG	.03 micron
115-55300	F553FW	3/8"	37	6 Oz.	Metal	Float Auto	40°-120°F	175 PSIG	.03 micron
115-55301	F553W	3/8"	37	6 Oz.	Metal	Manual	40°-160°F	250 PSIG	.03 micron
115-55400	F554FW	1/2"	37	6 Oz.	Metal	Float Auto	40°-120°F	175 PSIG	.03 micron
115-55401	F554W	1/2"	37	6 Oz.	Metal	Manual	40°-160°F	250 PSIG	.03 micron
115-57601	F576W	3/4"	60	10 Oz.	Metal	Manual	40°-160°F	250 PSIG	.03 micron
115-50508	F508-08W	1"	300	29 Oz.	Metal	Manual	40°-160°F	250 PSIG	.03 micron
115-50810	F508-10W	1-1/4"	300	60 Oz.	Metal	Manual	40°-160°F	250 PSIG	.03 micron
115-50812	F508-12W	1-1/2"	400	60 Oz.	Metal	Manual	40°-160°F	250 PSIG	.03 micron

## Filters, Regulators & Lubricators

Regulators and

Lubricators

#### **REGULATORS**

- Specialized control valve reduces upstream supply pressure level to a specified constant downstream pressure
- Regulates air pressure of the airline
- Self-relieving style units Available in

T-handle or adjustment knob • Adjustment knob features three position non-rising knob: push to lock, pull to adjust, detach to make tamper resistant • Reinforced diaphragm for repeated accuracy







112-00352






112-00262

ASCOT NO.	MFG. NO.	PIPE SIZE	MAX. FLOW SCFM	ADJUSTMENT Type	PRESSURE GAUGE PART NO.	GAUGE PART	OPERATING TEMP.	OPERATING PRESSURE	
112-00162	R162	1/4"	25	Adjustment Knob	117-01681*	1/8" NPT	40°-120°F	5 to 125 PSIG	
112-00262	R262**	1/4"	25	Adjustment Knob	117-01681*	1/8" NPT	40°-120°F	5 to 125 PSIG	
112-00352	R352	1/4"	50	Adjustment Knob	117-01481*	(2) 1/4" NPT	40°-120°F	5 to 125 PSIG	
112-00353	R353	3/8"	80	Adjustment Knob	117-01481*	(2) 1/4" NPT	40°-120°F	5 to 125 PSIG	
112-00354	R354T	1/2"	100	T-Handle	117-01481*	(2) 1/4" NPT	40°-120°F	5 to 125 PSIG	
112-00376	R376T	3/4"	220	T-Handle	117-01481*	(2) 1/4" NPT	40°-120°F	5 to 125 PSIG	
112-00378	R378T	1"	250	T-Handle	117-01481*	(2) 1/4" NPT	40°-120°F	5 to 125 PSIG	
112-03910	R3910	1-1/4"	700	T-Handle	117-01481*	(2) 1/4" NPT	40°-120°F	5 to 125 PSIG	
112-03912	R3912	1-1/2"	700	T-Handle	117-01481*	(2) 1/4" NPT	40°-120°F	5 to 125 PSIG	
112-01352	R352T		1/4" Regulator - T-Handle						
112-01354	R354GH			1/2" H	igh Pressure Regulator	- 10 to 250 PSI			

#### **LUBRICATORS**

- Injects a fine stream of oil into the air stream to automatically lubricate air operated tools and other devices
- Extends life of downstream components
- Precise control of oil feed with needle valve adjustment knob ■ Adds minimal pressure drop to the air system
- Features three position non-rising knob: push to lock, pull to adjust, detach to make tamper resistant ■ High air flow • Precise visual adjustment control ■ Low flow to establish drip rate





113-00353



113-01353

ASCOT NO.	MFG. NO.	PIPE SIZE	MAX. FLOW SCFM	BOWL CAP.	BOWL TYPE	OPERATING TEMP.	MAX. Pressure	OIL Delivery
113-00352	L352	1/4"	16	5 Oz.	Poly	40°-125°F	150 PSIG	2 SCFM
113-01352	L352W	1/4"	16	5 Oz.	Metal	40°-175°F	200 PSIG	2 SCFM
113-00353	L353	3/8"	82	5 Oz.	Poly	40°-125°F	150 PSIG	2 SCFM
113-01353	L353W	3/8"	82	5 Oz.	Metal	40°-175°F	200 PSIG	2 SCFM
113-00354	L354	1/2"	142	5 Oz.	Poly	40°-125°F	150 PSIG	2 SCFM
113-01354	L354W	1/2"	142	5 Oz.	Metal	40°-175°F	200 PSIG	2 SCFM
113-00376	L376W	3/4"	142	10 Oz.	Metal	40°-125°F	150 PSIG	2 SCFM
113-04108	4108W	1"	175	29 Oz.	Metal	40°-160°F	250 PSIG	2 SCFM

#### **ACCESSORIES FOR** FILTERS, REGULATORS & LUBRICATORS

ASCOT NO.	MFG. NO.	DESCRIPTION
117-00055	EK55	.03 Micron Coalescing Filter Element Replacement
117-00329	EKF329	40 Micron Filter Element - Fits 3/4" Units
117-00355	EK35-5	5 Micron Filter Element - Fits 1/4", 3/8" & 1/2" Units
117-00935	PMKR35	Filter/Regulator Mounting Kit
117-01481	1481	1/4" Back Mount Gauge
117-11481	1481B	1/4" Back Mount Gauge - 0-300 PSI
117-01681	1681	1/8″ Back Mount Gauge
117-05200	5200	Internal Drain Assembly



## ■ Industrial & Heavy Duty Hose Reels




## **Hose Reels**

#### PREMIUM INDUSTRIAL HOSE REELS

- Compact design allows reels to fit into tight **locations** • Corrosion resistant powder coated paint Extended service life due to permanently lubricated bearings and swivels • Versatile applications include easy mounts on wall, floor, ceiling or truck
- Air/Water hose included
   MADE IN THE USA





ASCOT NO.	MFG. NO.	HOSE ID	HOSE OD	HOSE LENGTH	HOSE PSI	TEMP.
124-04435	4435 OLP	1/4"	.500	35'	300	150°F
125-04625	4625 OLP	3/8"	.640	25'	300	150°F
125-05450	5450 OLP	1/4"	.500	50'	300	150°F
125-05635	5635 OLP	3/8"	.640	35'	300	150°F
125-05650	5650 OLP	3/8"	.640	50'	300	150°F
126-05850	A5850 OLP	1/2"	.781	50'	300	150°F
126-15650*	B5650 OLP	3/8"	.640	50'	300	150°F
126-15851*	B5850 OLP	1/2"	.640	50'	300	150°F

<sup>\*126-15650</sup> and 125-15851 include a latch ratchet

#### HEAVY DUTY INDUSTRIAL REELS

- Compact design Substantial support Air/ Water (OLP), Oil (OMP) or Grease (OHP)
- All-steel construction with engineered ribs/ forms 

  Baked-on powder coat finish provides corrosion resistance • MADE IN THE USA





ASCOT NO.	MFG. NO.	HOSE ID	HOSE OD	HOSE LENGTH	HOSE PSI	TEMP.
125-07650	7650 OLP	3/8"	.688	50'	300	150°F
125-07670	7670 OLP	3/8"	.688	70'	300	150°F
126-07850	7850 OLP	1/2"	.844	50'	300	150°F
125-07651	7650 OMP	3/8"	.690	50′	2250	210°F
126-07851	7850 OMP	1/2"	.815	50'	2000	210°F
124-07450	7450 OHP	1/4"	.590	50'	5000	210°F
125-07652	7650 OHP	3/8"	.750	50'	4000	210°F

<sup>\*7850</sup> OLPSW available. Comes standard with the ability to mount to a wall



REELCRAFT RT Series Hose Reels, Side Mounted & Dual Pedestal Hose Reels

#### RT SERIES **HOSE REELS** Adjustable guide arm locates to seven positions • Oversized main shaft increases support ■ Long life drive spring ■ Easy to mount due to slotted mounting holes for safer and easier installation Air/Water hose included ■ Models RT650-OLPG and RT850-OLPG specifically designed 125-06501 for dispensing nitrogen gas

ASCOT NO.	MFG. NO.	HOSE ID	HOSE OD	HOSE LENGTH	HOSE PSI	TEMP.
124-04500	RT450-OLP	1/4"	.500	50'	300	150°F
125-06350	RT635-OLP	3/8"	.640	35'	300	150°F
125-06500	RT650-OLP	3/8"	.640	50'	300	150°F
126-08500	RT850-OLP	1/2"	.781	50'	300	150°F
125-06501	RT650-OLPG	3/8"	.640	50'	300	150°F
126-08501	RT850-OLPG	1/2"	.781	50'	300	150°F

#### SIDE MOUNTED REELS/ SERIES RT Main drive spring completely containerized and permanently sealed Stainless steel torsion spring Widened ratchet and latch pawl design greatly reduces wear and increases service life ■ High quality brass hose crimpings ■ Air/water hose included . MADE IN THE USA 125-65038

ASCOT NO.	MFG. NO.	HOSE ID	HOSE OD	HOSE LENGTH	HOSE PSI	TEMP.
124-45014	RT450-OLPSM	1/4"	.500	50'	300	150°F
125-65038	RT650-OLPSM	3/8"	.640	50'	300	150°F
125-83512	RT835-OLPSM	1/2"	.500	35'	300	150°F
125-85012	RT850-OLPSM	1/2"	.640	50'	300	150°F
124-65138	RT650-OMPSM*	3/8"	.640	50'	1000	150°F

#### **DUAL PEDESTAL HOSE REELS**

■ Compact dual pedestal design ■ Features an innovative, non-welded, interlocking base ■ Stand up to heavy vibration, ideal for truck-mounted applications ■ Dual pedestal base and guide arm are structurally reinforced • All-steel construction and baked-on powder coat finish ■ MADE IN THE USA





ASCOT NO.	MFG. NO.	HOSE ID	HOSE OD	HOSE LENGTH	HOSE PSI	TEMP.
124-75435	DP5435 OLP	1/4"	.475	35'	300	150° F
124-75450	DP5450 OLP	1/4"	.475	35'	300	150° F
124-77450	DP7450 OLP	1/4"	.475	35'	300	150° F
125-75635	DP5635 OLP	3/8"	.600	50'	300	150° F
125-75650	DP5650 OLP	3/8"	.600	50'	300	150° F
125-77650	DP7650 OLP	3/8"	.600	50'	300	150° F
126-75835	DP5835 OLP	1/2"	.750	35'	300	150° F
126-77850	DP7850 OLP	1/2"	.750	50'	300	150° F
126-87850	DP7850 OLP240-RH	1/2"	.750	50'	300	150°F
126-97850	DP7850 OLP240	1/2"	.750	50'	300	150° F



## 40 AIR SYSTEMS // AIR HOSES, HOSE REELS & HOSE PRODUCTS

Heavy Duty Hose Reels, Industrial Steel Frame, Cord Reels




## Hose Reels (cont.)

#### **HEAVY DUTY** MOBILE BASE **HOSE REELS**

Designed to accommodate up to 100' of 3/8" I.D. hose or 75' of 1/2" I.D. hose

Slightly more robust than the standard 7000 series hose reels ■ The heavy duty base design, all steel construction and a baked-on powder coat finish combine to produce a rugged, corrosion-resistant product ■ A newly redesigned latching mechanism provides



ASCOT NO.	MFG. NO.	HOSE ID	HOSE OD	HOSE LENGTH	HOSE PSI	TEMP.
125-76050	HD76050 OLP	3/8"	.600	50	300	150° F
125-76070	HD76070 OLP	3/8"	.600	70	300	150° F
125-76075	HD76075 OLP	3/8"	.600	75	300	150° F
125-76100	HD76100 OLP	3/8"	.600	100	300	150° F
126-78050	HD78050 OLP	1/2"	.750	50	300	150° F
126-78075	HD78075 OLP	1/2"	.750	75	300	150° F
126-79025	HD79025 OLP	3/4"	1.075	25	250	150° F

#### **GENERAL INDUSTRIAL** AIR/WATER

- Full flow swivel and heavy gauge steel frame
- All-bolted unitized construction with no welds to fatigue ■ Hand Crank (CA) and 12VDC Electric Motor (EA) driven
- MADE IN THE USA



ASCOT NO.	MFG. NO.	HOSE ID	HOSE OD	HOSE LENGTH	PSI
126-21120	CA32112 L	1/2"	.845	200'	1000
126-21121	EA32112 L12D	1/2"	.845	200'	1000
126-31120	CA33112 L	3/4"	1.188	100'	1000
126-31121	EA33112 L12D	3/4"	1.188	100'	1000
126-31180	CA33118 L	3/4"	1.188	175'	1000

#### CORD REELS OPEN STYLE

For indoor, non-weather-tight applications only • All models UL listed at 115 volt 60 hz single phase; reels without cord suitable for 220 volt ■ Incandescent bulb 75 watt maximum • Cord Included • MADE IN THE USA





ASCOT NO.	MFG. NO.	WIRE SIZE AWG	NO. OF WIRES	CORD LENGTH	VOLTS	MAX. AMPS	
	II.	ICANDESCE	NT				
312-40351	L 4035 163 1	16	3	35'	115	13	
312-40501	L 4050 163 1	16	3	50'	115	13	
	FLUORESCENT						
312-40352	L 4035 162 2	16	2	35′	115	0.3	
312-40502	L 4050 162 2	16	2	50'	115	0.3	
	SINGLE OUTLET						
312-40353	L 4035 163 3	16	3	35'	115	13	
312-40503	L 4050 163 3	16	3	50′	115	13	
312-45453	L 4545 123 3	12	3	45'	115	25	
	T	RIPLE OUTL	ET				
312-45454	L 4545 123 9	12	3	45'	125	15	
312-45455	L 4545 123 9G	16	3	50'	125	15	
	LED						
312-40504	L 4050 163 10 (LED)	16	3	50'	125	13	



## AIR HOSES, HOSE REELS & HOSE PRODUCTS // AIR SYSTEMS 41

Nitrogen Reels, Low Pressure Hose Reels, Evolution & Classic Series

#### NITRO-PRO NITROGEN REEL

- EZ-Coil controlled retraction for greater safety - Special "Nitrogen green" proprietary "CPC" powder-coated finish for long lasting durability ■ Factory-matched lubricated containerized spring motor for trouble free, enduring performance ■ 50' of green 3/8" I.D.
- nitrogen hose & adjustable hose stop ■ Nitrogen quality seals in the solid brass, 360-degree swivel inlet



ASCOT NO.	MFG. NO.	HOSE ID	HOSE OD	HOSE LENGTH	HOSE PSI
127-05880	EZ-P-NP-350	3/8"	50'	300	1000

#### LOW PRESSURE HOSE REELS FOR AIR AND WATER

#### High quality epoxy powder coated steel construction

Sturdy 1" solid steel axle with 1" self-lubricated precision bearings ■ Steel base plate and support post add stiffness reducing vibration ■ Multi-position guide arm adjusts to 10 different mounting positions • 8-position locking ratchet secures hose at desired length ■ Self-retracting spring return reels ■ Factory balanced cartridge-style spring motor provides safe maintenance - Solid



ASCOT NO.	MFG. NO.	HOSE ID	HOSE OD	HOSE LENGTH	HOSE PSI
124-13500	P-LP-135	1/4"	1/2"	35'	250
124-15000	P-LP-150	1/4"	1/2"	50′	250
124-33500	P-LP-335	3/8"	21/32"	35'	250
125-35004	P-LP-350	3/8"	21/32"	50′	250
126-42500	P-LP-425	1/2"	27/32"	25'	250
126-43500	SH-N-435	1/2"	27/32"	35'	250
126-45000	SH-N-450	1/2"	27/32"	50′	250
126-52500	SH-N-525	3/4"	1-5/32"	25'	250

#### HOSFTRACT ®

C-SERIES LOW PRESSURE HOSE REELS

Reels ideally suited for plant maintenance. service trucks or other industrial functions

Standard hose for air and water • Single set screw to access spring casing • Drive spring mechanism lubricated for life • One piece combination latch, spring arbor, main bearing and spool support for fewer moving parts • Brass swivel reduces corrosion potential 

Durable powder coated finish • MADE IN THE USA



ASCOT NO.	MFG. NO.	OPERATING PRESSURE	HOSE ID	HOSE LENGTH	SHIP WEIGHT
125-35000	LC-350	300 PSI	3/8"	50'	54 Lbs.
125-55000	LC-550	300 PSI	1/2"	50'	60 Lbs.



ASCOT NO.	MFG. NO.	OPERATING PRESSURE	HOSE ID	HOSE LENGTH	SHIP WEIGHT
125-21408	2140-008	300 PSI	3/8"	50'	44 Lbs.
125-21410	2140-010	300 PSI	1/2"	30'	46 Lbs.
125-21215	2120-015	300 PSI	3/8"	50'	60 Lbs.



#### Hose Reels & Air Hoses

# Air Hoses and **Hose Products**



#### COUPLED AIR HOSES

- Reinforced with heavy duty polyester cord
- 325 PSI EPDM abrasion resistant cover
- Bend restrictors both ends Premium machined brass alloy fittings ■ -40° to +200° F





ASCOT NO.	MFG. NO.	DESCRIPTION
121-01225	98101646	Coupled 1/2" x 25' Reinforced Domestic Air Hose
121-01250	98101648	Coupled 1/2" x 50' Reinforced Domestic Air Hose
121-03825	98101640	Coupled 3/8" x 25' Reinforced Domestic Air Hose
121-03851	98101642	Coupled 3/8" x 50' Reinforced Domestic Air Hose

#### 1/4" BULK DOMESTIC AIR HOSE

- Used in automotive. agricultural and construction applications
- 1/4" ID x 325 PSI Temp Range: -40°F to +200°F Multi-spiral polyester varn reinforcement makes hose easy to handle and very flexible ■ EPDM tube and cover resists
- MADE IN THE USA





ASCOT NO. MFG. NO. 121-14700

91008400



121-14700

1/4" x 700' Domestic Bulk Air Hose (325 PSI) Reel

#### **ULTRAFLEX** AIR HOSE

Specially

designed hose that has been developed to cater to today's high demand conditions and use ■ Available in 32', 65' and 100' *lengths* ■ Stavs flexible in the cold and does not kink in the heat ■ Full airflow in all weather conditions

**300** psi working pressure • Available in 3/8" and 1/4" male fittings



121-56345

ASCOT NO.	MFG. NO.	DESCRIPTION
121-56323	56.3234RPG	1/2" x 32' UltraFlex Air Hose - 300 PSI
121-56324	56.3245RPG	1/2" x 65' UltraFlex Air Hose - 300 PSI
121-56325	56.3256RPG	1/2" x 100' UltraFlex Air Hose - 300 PSI
121-56334	56.3134NA	3/8" x 32' UltraFlex Air Hose - 300 PSI
121-56345	56.3145NA	3/8" x 65' UltraFlex Air Hose - 300 PSI
121-56356	56.3156NA	3/8" x 100' UltraFlex Air Hose - 300 PSI

#### **COATS REPLACEMENT** AIR HOSE

■ For use with Coats Tire **Changers** ■ 60" long x 1/4" diameter ■ AC-1 Eurostyle chuck ■ All brass connectors ■ Swivel fitting

■ Equivalent to Coats 806871

ASCOT NO. MFG. NO. DESCRIPTION

60" x 1/4" Coats Replacement Air 127-86871 86871-1 Hose (Packaged 1 per bag)

#### **HUNTER REPLACEMENT** AIR HOSE

- For use with Coats Tire Changers
- 60" long x 1/4" diameter
- European-style air chuck
- All brass connectors
- Packaged 1 per bag



127-86872 86872-1 60" x 1/4" Hunter Replacement Air Hose (Packaged 1 per bag)



127-86871



### Air Hoses, Hose Products





ASCOT NO.	MFG. NO.	DESCRIPTION
123-14012	1/4x1/4x1/4x12	1/4" Blue Recoil Air Hose - 1/4" x 1/4" Swivel Fittings (12' Length)
123-14025	1/4x1/4x1/4x25	1/4" Blue Recoil Air Hose - 1/4" x 1/4" Swivel Fittings (25' Length)
123-14050	1/4x1/4x1/4x50	1/4" Blue Recoil Air Hose - 1/4" x 1/4" Swivel Fittings (50' Length)
123-38025	3/8x1/4x1/4x25	3/8" Blue Recoil Air Hose - 1/4" x 1/4" Swivel Fittings (25' Length)
123-38050	3/8x1/4x1/4x50	3/8" Blue Recoil Air Hose - 1/4" x 1/4" Swivel Fittings (50' Length)
123-38150	3/8x3/8x3/8x25	3/8" Blue Recoil Air Hose - 3/8" x 3/8" Swivel Fittings (25' Length)

#### **HOSE STOP**

- Adjustable 3/8" to 1/2"
- Hose stops for 1/4", 3/8" and 1/2" ID hoses

ASCOT NO.	MFG. NO.	DESCRIPTION
127-22301	2230-010	1/2" Hose Stop
127-22325	2230-025	3/8" Hose Stop
127-22309	2230-009	1/4" Hose Stop

## **B**alcrank



127-22301

#### **HOSE CUTTER** Hand tool for straight, even, clean cut on heater, air conditioning and braided rubber or plastic hose up to 1-1/8" diameter

osc up to	) i i, o u		
ASCOT NO.	MFG. NO.	DESCRIPTION	137-10010
137-10010	10010	Hose Cutter	137-10010
137-10011	10011	(2) High Grade Carbon Steel Replacement Blades	

#### **BLOW GUNS**

- Non-restricted, full pressure performance
- Sturdy, high-tech composite material



128-72025

ASCOT NO.	MFG. NO.	NOZZLE	DESCRIPTION
128-72021	272020SH	Venturi	High-output, OSHA-compliant
128-72022	27202SIL	Silent	Quiet, OSHA Compliant
128-72023	27202PRE	Standard	Standard, non-Scratch Nozzle
128-72024	27202ECR	Air Shield	Unique Air Shield Nozzle
128-72025	27202MTL	Metal	Durable Metal Nozzle
128-72025	27202MTL	Metal	



Air Line Couplers & Plugs

# Air Line Couplers and Plugs



#### 1/4" LINCOLN LONG NOSE

- Brass plated couplers with hardened steel balls and stainless steel springs
- Plugs heat-treated to reduce wear on critical mating surfaces Interchange with Lincoln "Long Nose Series" as well as units produced by other manufacturers



ASCOT NO.	DILL. NO.	MILTON NO.	AMFLO. No.	SCHRADER NO.	THREAD	NPT	
COUPLERS							
131-61486	N/A	794	C27	598392	Male	1/4"	
131-61548	123	790	C28	506329	Female	1/4"	
		ADA	PTER PLI	JGS			
131-61550	126	791	CP27	700665	Male	1/4"	
131-61551	125	792	CP28	700664	Female	1/4"	



#### 1/4" ARO SERIES

 Brass plated couplers with hardened steel balls and stainless steel springs • Plugs heat-treated to reduce wear on critical mating surfaces ■ Interchange with Aro 210 series as well as units produced by other manufacturers Maximum working pressure 300 PSI



ASCOT NO.	NO.	MILTON NO.	SCHRADER NO.	AMFLO. NO.	THREAD	NPT	
COUPLERS							
131-61526	8888	775	506599	C38	Female	1/4"	
131-61527	N/A	776	3525	C37	Male	1/4"	
131-08888	Push-to- Connect	775	Dill 8888	Push-to- Connect	Female	1/4"	
		ADA	PTER PLUG	S			
131-61529	8889	778	700757	CP38	Female	1/4"	
131-61528	8891	777	700776	CP37	Male	1/4"	



#### 1/4" AUTOMOTIVE STANDARD (TRU-FLATE)

- Brass plated couplers with hardened steel balls and stainless steel springs ■ Plugs heat-treated to reduce wear on critical mating surfaces Interchange with Tru-Flate 10 and 100 type series as well as units produced by other manufacturers
- Maximum working pressure 300 PSI



ASCOT NO.	DILL. No.	MILTON No.	AMFLO. No.	SCHRADER NO.	THREAD	NPT
COUPLERS						
131-61523	D-13	785	C2	506079	Female	1/4"
131-61524	D-12	786	C1	506009	Male	1/4"
131-62523		D-	-13R		Female	1/4"
		ADA	PTER PL	JGS		
131-61539	D-3C	784	CP2	700691	Female	1/4"
131-61538	D-2C	783	CP1	700735	Male	1/4"



#### 1/4" INDUSTRIAL INTERCHANGE SERIES

Brass plated couplers with hardened steel balls and stainless steel springs ■ Plugs heat-treated to reduce wear on critical mating surfaces ■ Interchange with Aro, Foster, Milton as well as units produced by other manufacturers

■ Maximum working pressure 300 PSI



ASCOT NO.	DILL. NO.	MILTON NO.	AMFLO. No.	SCHRADER NO.	THREAD	NPT	
COUPLERS							
131-61573	102	715	C20	506089	Female	1/4"	
131-61574	103	716	C21	506249	Male	1/4"	
ADAPTER PLUGS							
131-61578	110	727	CP21	700677	Male	1/4"	
131-61579	109	728	CP20	700688	Female	1/4"	



## Air Line Couplers & Plugs

#### 1/4" RETREADER SERIES

#### 1/2" TRUE-FLATE SERIES

 Brass plated couplers with hardened steel balls and stainless steel springs ■ Plugs heat-treated to reduce wear on critical mating surfaces • Maximum working pressure 300 PSI



133-61471

133-61569

ASCOT NO.	DILL. NO.	MILTON NO.	AMFLO. NO.	SCHRADER NO.	THREAD	NPT
		C	<b>OUPLERS</b>			
133-61563	D-17	1815	C10	503140	Female	1/2"
133-61564	D-16	1816	С9	503104	Male	1/2"
133-61471	D-17R	_	C10R	_	Female	1/2"
		ADA	PTER PLI	JGS		
133-61569	D-3F	1818	CP10	700725	Female	1/2"
133-61568	D-2F	1817	CP9	700626	Male	1/2"
133-61474	D-0F	1819	CP9-03	3537	Male	3/8"
133-01855	N/A	1855	N/A	1855	Male	1/4"



132-61476

#### 3/8" AUTOMOTIVE SERIES

 Brass plated couplers with hardened steel balls and stainless steel springs • Plugs heattreated to reduce wear on critical mating surfaces • Maximum working pressure 300 PSI

132-61480



132-61478

ASCOT NO.	DILL. NO.	MILTON NO.	AMFLO. No.	SCHRADER NO.	THREAD	NPT
		C	<b>OUPLERS</b>	3		
132-61476	D-15C	1803	C8	502191	Male	1/4'
132-61478	N/A	1804	C7	502181	Female	1/4'
172 61557	D 1EC	10 N E	CE	E02141	Fomalo	7/0

132-61478	N/A	1804	C7	502181	Female	1/4"	
132-61553	D-15C	1805	C6	502141	Female	3/8"	
132-61554	N/A	1806	C5	502105	Male	3/8"	
ADAPTER PLUGS							
132-61481	D-1E	1810	CP8	700835	Female	1/4"	
132-61480	D-0E	1809	CP7	700750	Male	1/4"	
132-61559	D-3E	1808	CP6	700647	Female	3/8"	
132-61558	D-2E	1807	CP5	700752	Male	3/8"	
133-01855		18	Male	1/4"			



13	7-01377	13-	1-01343	
ASCOT NO.	MILTON NO.	AMFLO NO.	SCHRADER NO.	DESCRIPTION
134-61544	779	CP12	700624	Female 1/4" NPT Steel Plug (.302-32 Std.)
134-61545	787	C2RB	_	Female 1/4" NPT Brass Coupler With Sleeve
134-61487	_	C2R	598390	Female 1/4" NPT Steel Coupler
134-61552	781	61-552	3510	Female 1/4" NPT Plug (.482 - 26-3/4")
134-61543	_	CPI-302	510121	Male 1/4" NPT Plug (.302-32 inner & outer thread)

#### QUICK RELEASE COUPLER

■ 1/4" female ■ Reduces the chance of an accidental air line disconnect

 Double-click push button safety coupler relieves air pressure for safe disconnect



ASCOT NO. MFG. NO.

131-00020 NSPQ-SF-20 Quick Release Coupler

#### **FEMALE RECAP PLUG**

■ Case hardened steel, plated to resist rust • MAXIMUM INLET PRESSURE: 300 PSI • MAXIMUM **TEMPERATURE:** 250° F ■ **AIR FLOW:** 40 SCFM ■ Equivalent to Milton 731



ASCOT NO. MFG. NO. DESCRIPTION

131-61531 M-Style Female Recap Plug: .305-32

#### HI-FLO/HVLP COUPLER

Designed for air tools and paint spray equipment • Provides up to 50% more air flow than conventional couplers ■ Hi-Flo couplers/plugs for use with sanders, grinders and high air usage tools ■ HVLP couplers for use with paint spray guns



ASCOT NO.	MILTON NO.	AMFLO NO.	DESCRIPTION
135-00900	764	C90	1/4" FNPT Hi-Flo/HVLP Coupler-Brass
135-00910	765	C91	1/4" MNPT Hi-Flo/HVLP Coupler-Brass
135-00980	N/A	C98	1/4" FNPT Hi-Flo Coupler-Steel
135-00901	761-1	CP90	1/4" FNPT Hi-Flo Plug-Steel
135-00911	760-1	CP91	1/4" MNPT Hi-Flo Plug-Steel



133-01855

Air Line Couplers & Plugs



#### HYDRAULIC COUPLERS

■ High-flow hydraulic coupler, 10,000 PSI working pressure



135-10605

135-10606

ASCOT NO.	MFG. NO.	DESCRIPTION
135-10605	PVV-38-M	3/8" Male Hose Half Coupler - For Hydraulic Rams
135-10606	PVV-38-F	3/8" Female Ram Half Coupler - For Hydraulic Rams

#### HYDRAULIC QUICK CONNECT COUPLER/PLUG

10.000 PSI maximum operating pressure - Safety sleeve lock prevents accidental disconnection Heavy duty back-up ring prevents o-ring extrusion ■ Heat treated and plated steel for greater wear and corrosion resistance - Selfsealing poppet valves provide excellent high and low pressure seating • Coupler equivalent to Parker TC-371, AME TC-371 & ESCO 10626 ■ Plug equivalent to Parker TC-372. AME TC-372 & ESCO 10625





ASCOT NO.	MFG. NO.	DESCRIPTION
135-11606	FD35-1001-0606	Hydraulic Quick Connect Coupler
135-12606	FD35-1002-0606	Hydraulic Quick Connect Plug

#### COMBO COUPLER®

■ One coupler fits 1/4" Aro Style, 1/4" Automotive Standard and 1/4" Industrial Interchange plugs



135-61241

ASCOT NO.	MFG. NO.	SCHRADER NO.	MILTON NO.	DESCRIPTION
135-61240	C60	-	745	1/4" Series, 1/4" NPT Female
135-61241	C61	-	746	1/4" Series, 1/4" NPT Male

#### RUBBER DUST COVER FOR HYDRAULIC COUPLERS

■ Hydraulic coupler dust cap ■ Used to keep dirt and debris from your hydraulic coupler when not connected

■ Made of a durable rubber material

Equipped with a pre-slit ring to allow coupler to slide easily over the counter ■ Comes standard with 8' and 10' hydraulic hoses

ASCOT NO. MFG. NO. DESCRIPTION

03-RDC 319-03732 Rubber Dust Cover for Hydraulic Couplers

#### **ALUMINUM DUST COVER**

• Hydraulic coupler dust cap • Used to keep dirt and debris from your hydraulic coupler when not connected ■ Made from

a durable aluminum material

ASCOT NO. DESCRIPTION MFG NO

319-32202 C-A02 Aluminum Dust Cover for Hydraulic Couplers

#### PARKER E-Z TO CONNECT/ DISCONNECT COUPLING

■ E-Z-Mate is an exhaust type coupler designed to exhaust air pressure prior to disconnection • Valve sleeve acts as integral shut-off valve ■ Meets ISO 4414 requirements ■ Built-in sleeve-lok mechanically locks the valve sleeve



319-03732

319-32202


ASCOT NO.	MFG NO.	BODY SIZE	THREAD SIZE
	FEMAL	E COUPLERS	
131-02514	EZ-251-4FP	1/4"	1/4-18
131-02516	EZ-251-6FP	1/4"	3/4-18
132-03716	EZ-371-6FP	3/8"	3/8-18
132-03718	EZ-371-8FP	3/8"	1/2-14
133-05018	EZ-501-8FP	1/2"	1/2-14
133-05012	EZ-501-12FP	1/2"	3/4-14
133-75112	EZ-751-12FP	3/4"	3/4-14
133-75116	EZ-751-16FP	3/4"	1-11-1/2

ASCOT NO.	MFG NO.	BODY SIZE	THREAD	NPT
		NIPPLES		
131-17000	1857	1/2"	Male	1/2"
131-18000	1858	1/2"	Female	1/2"
133-17030	1859	1/2"	Male	3/8"



## Air Line Couplers & Plugs

# Air Line Couplers & Plugs: **Identification Chart**

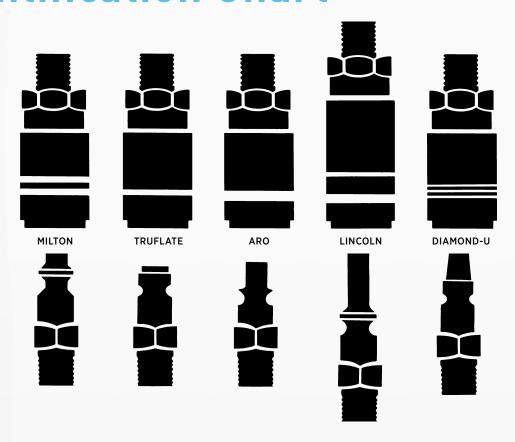

DILL NO.	MILTON NO.	AMFLO NO.	SCHRADER NO.
	1/4" TRU-FLATE	AUTOMOTIVE TYPE	
C1	786	D-12	3503
C2	785	D-13	3504
C2R	787	D-13R	3505
CP1	783	D-2C	3506
CP2	784	D-3C	3507
CP12	779	D-6C	3508
CP14	481	D-7CR	3510
CP1-302	_	D-5C	3533
	1/4" "ARO" SPE	ED SERIES TYPE	
C38	775	8888	3526
CP37	777	8891	3529
CP38	778	8889	3530
	1/4" INDUSTRIAL I	<b>NTERCHANGE TYP</b>	E
CP21	727	110	5138-11
CP20	728	109	5139-11
C21-103	719	_	5140-12
C21	716	103	5141-12
C20	715	102	5142-12
_	711	_	5142C-D
CP21-42	736	_	5223-11
CP21-103	733	115	5263-11
C20-23	718	_	5263-12

DILL NO.	MILTON NO.	AMFLO NO.	SCHRADER NO.	
	1/4" LINCOLN L	ONG STEM TYPE		
C28	790	123	3528	
CP27	791	126	3531	
CP28	792	125	3532	
	3/8" TRU-I	FLATE TYPE		
C5	1806	-	3515	
C6	1805	D-15	3516	
CP5	1807	D-2E	3517	
CP6	1808	D-3E	3518	
CP7	1809	D-03	3519	
CP8	1810	-	3520	
C8	1803	D-15C	3521	
3	3/8" INDUSTRIAL INTERCHANGE TYPE			
C26	1835	117	3541	
CP25	1837	122	3542	
CP26	1837	12	3543	
	1/2" TRU-	LATE TYPE		
C9	1818	D-16	3511	
C10	1815	D-17	3512	
C10R	_	D-17R	-	
CP9	1817	D-2F	3513	
CP10	1818	D-3F	3514	
CP9-03	1819	D-0F	3537	




Air Tank, Blow Gun & Hose Adapters

## **RPG 10-GALLON** PORTABLE AIR TANK



■ Perfect for emergency tire inflation ■ 125 PSI maximum pressure with manifold provides plenty of usable air for inflation tasks • 4' hose and ball foot air chuck makes it easier to get to hard to reach areas • Drain port included for regular draining to help eliminate rust and to help stop compressor generated water from flowing down the air line





ASCOT NO.	MFG. NO.	DESCRIPTION

91001ASC RPG 10-Gallon Portable Air Tank



#### STANDARD BLOW GUN

Compact blo-gun with safety & rubber tip



128-20000

ASCOT NO. MFG. NO. DESCRIPTION 128-20000 200K Blo-Gun



#### **SOLID BRASS FEMALE CROSSES**

■ Excellent for running several air lines from a common supply hose



136-00344

ASCOT NO.	MFG. NO.	NPT THREAD
136-00344	344X	1/4"
136-00366	366X	3/8"

#### **BRASS IN-LINE SWIVELS**

■ Simple design is excellent to stop hoses from kinking or for use in pneumatic equipment applications



ASCOT NO.	MFG. NO.	NPT THREAD	136-02366
136-02344	344R	1/4" Male/Female NPT	
136-02366	366R	3/8" Male/Female NPT	



#### SOLID BRASS **FEMALE TEES**

Use to run two lines from a common feed



ASCOT NO.	MFG. NO.	NPT THREAD
136-01344	655	1/4"
136-01366	655-1	3/8"

## 136-01366

#### SOLID BRASS SWIVEL

 Simple design is excellent to stop hoses from kinking or for use in pneumatic equipment applications



136-34490

ASCOT NO.	MFG. NO.	NPT THREAD
136-34490	660	1/4" Male/Female Swive



# **Hose Adapters and Fittings**



#### UNISWIVELS

■ Features a full 360° swivel to keep hose from twisting when using air operated tools and while paint spraying



136-02366

**NPT THREAD** ASCOT NO. MFG. NO. 1/4" NPTF x 1/4" NPTM 136-03344 S657

#### STANDARD MALE HOSE BARB FITTINGS

■ Select fitting to match hose ID ■ Fittings must be secured to hose with either a hose clamp or crimped-on ferrule



ASCOT NO.	MFG. NO.	NPT THREAD	HOSE ID
136-00401	600	1/4"	1/4"
136-00604	604	3/8"	1/4"
136-00406	602	1/4"	3/8"
136-00606	603	3/8"	3/8"
136-00806	806	1/2"	3/8"
136-00408	408	1/4"	1/2"
136-00608	604	3/8"	1/2"
136-00808	604-1	1/2"	1/2"
136-71404	07001-0404	1/4"	1/4"
136-71504	07001-0504	5/16"	1/4"
136-71604	07001-0604	3/8"	1/4"
136-71606	07001-0606	3/8"	3/8"
136-71806	07001-0806	1/2"	3/8"
136-71808	07001-0808	1/2"	1/2"

#### REUSABLE HOSE REPAIR FITTINGS

Makes air tight connection without using hose clamps ■ Must closely match hose OD (outer diameter) and ID (inner diameter) accurately before ordering • Minimum order is box of ten

#### STANDARD FEMALE **HOSE BARB FITTING**







137-00621

ASCOT NO.	MFG. NO.	HOSE OD	HOSE ID	NPT
137-00418	615-8	1/2"	1/4"	1/4"
137-00439	615	9/16"	1/4"	1/4"
137-00420	617	5/8"	1/4"	1/4"
137-00621	621	21/32"	3/8"	1/4"





137-01621

ASCOT NO.	MFG. NO.	HOSE OD	HOSE ID	NPT
137-01418	418F	1/2"	1/4"	1/4"
137-01439	439F	9/16"	1/4"	1/4"
137-01520	520F	5/8"	5/16"	1/4"
137-01621	621F	21/32"	3/8"	1/4"
137-01623	623F	23/32"	3/8"	1/4"
137-01624	624F	21/32"	3/8"	3/8"
		.,	.,,,	-

## Hose Adapters & Fittings



#### **HOSE SPLICERS**



ASCOT NO.	MFG. NO.	HOSE OD	HOSE ID
136-71405	07014-05	5/16"	5/16"
136-71406	07014-06	3/8"	3/8"
136-71408	07014-08	1/2"	1/2"
136-71440	07014-04	1/4"	1/4"
137-11520	520S	5/8"	5/16"
137-11621	621S	21/32"	3/8"
137-11623	623S	23/32"	3/8"

#### MALE PIPE COUPLINGS

Solid Brass NPT



137-00344

ASCOT NO.	MFG. NO.	MALE NPT	MALE NPT
137-00344	646	1/4"	1/4"
137-00346	643-1	3/8"	1/4"
137-00366	643-3	3/8"	3/8"
137-00388	647-2	1/2"	1/2"

#### PIPE COUPLING **FEMALE NPT**

Solid Brass



137-01344

ASCOT NO.	MFG. NO.	MALE NPT
137-01344	643	1/4" x 1/4"

#### **BUSHINGS AND ADAPTERS**

Solid Brass

136-61264

Maria	A A A
	137-01346
- all	137-01340

	ASCOT NO.	MFG. NO.	MALE NPT	FEMALE NPT
	<b>136-61264</b> 06120-0604		1/4"	3/8"
_	137-01324	650	1/4"	1/8"
_	137-01346	651	3/8"	1/4"
_	<b>137-01348</b> 651-1		1/2"	1/4"
<b>137-01368</b> 652		1/2"	3/8"	
	137-01389	652-8	3/4"	1/2"

#### **BRASS FERRULES**

For use with hose barb fittings Use with hose crimper (Ascot No. 137-08550) • QUANTITY: 50 per box

ASCOT NO.	MFG. NO.	FERRULE I.D.
137-73215	7321-50	.478"
137-73225	7322-50	.500"
137-73235	7323-50	.527"
137-73255	7325-50	.562"
137-73265	7326-50	.593"
137-73275	7327-50	.625"
137-73285	7328-50	.656"
137-73295	7329-50	.687"
137-73305	7330-50	.718"
137-73315	7331-50	.750"
137-73325	7332-50	.781"
137-73335	7333-50	.812"
137-73345	7334-50	.825"
137-73355	7335-50	.850"
137-39525	3952-50	.875"
137-50291	5029A-50	.900"
137-72421	7242A-50	.937"



137-73255

#### STANDARD HOSE CRIMPER

■ Provides production capability and "big tool" crimping advantages at a much lower cost ■ Heavy duty ductile iron casting and hardened steel dies for long service life and positive crimping • With five dies for crimping 1/4" single braid to 3/8" double braided hose





## Hose Fittings

# 2-Ear Clamps



#### **OETIKER 2-EAR CLAMPS**

 Especially suited for industrial or heavy vibrating equipment ■ Medium pressure clamp that is used for maintenance and OEM applications 

Rubber hose, plastic tubing, coaxial and electrical cable, rope are easily clamped

• APPLICATIONS: For air, fluid, gas and steam line



ASCOT NO.	MFG. NO.	NOMINAL SIZE	INCHES CLOSED-OPEN	MM CLOSED-OPEN	INNER INCHES	WIDTH OF EAR
316-00507	507	1/4"	.197-276"	5-7 mm	.236"	6.0 mm
316-00709	709	5/16"	.276354"	7-9 mm	.276"	7.0 mm
316-00911	911	7/16"	.355433"	9-11 mm	.276"	7.0 mm
316-01113	1113	1/2"	.433512"	11-13 mm	.276"	7.0 mm
316-01315	1315	9/16"	.512591"	13-15 mm	.295"	7.5 mm
316-01517	1517	19/32"	_	_	-	_
316-01518	1518	5/8"	.591708"	15-18 mm	.315'	8.0 mm
316-01720	1720	3/4"	.669787"	17-20 mm	.335"	8.5 mm
316-01922	1922	13/16"	.748866"	19-22 mm	.354"	9.0 mm
316-02023	2023	7/8"	.787905"	20-23 mm	.354	9.0 mm
316-02225	2225	15/16"	.866984"	22-25 mm	.394"	10.0 mm
316-02327	2327	1"	.905-1.063"	23-27 mm	.394"	10.0 mm
316-03740	3740	1-1/2"	_	<u> </u>	_	_

#### **HOW TO APPLY:**

(This procedure works for either eared clamp)



Position clamp on hose as illustrated.



Give each ear a firm squeeze with your OETIKER pincers.



Where access to ear is difficult, use OETIKER's side jaw pincers.

Please see Oetiker 2-Ear Clamp Service Kit on the next page





Hose Fittings

# 2-Ear Clamp Service Kit, Pinch Clamps



#### **OETIKER 2-EAR CLAMP SERVICE KIT**

**SERVICE KIT CONTAINS THE FOLLOWING SIZES:** (15) 5/16"; (15) 7/16"; (15) 1/2"; (15) 9/16"; (12) 5/8"; (12) 3/4"; (12) 7/8"; (12) 15/16"; (12) 1"; and (1) pair straight jaw pincers



316-91098

ASCOT NO.	DESCRIPTION
316-91098	Complete Kit
316-01098	Pincer Only



#### PINCH CLAMPS

■ Made from stainless steel ■ Feature a specialized tongue-in-groove design to provide a tight, secure seal ■ Tamper evident design ■ Ideal for both flexible and inflexible thin-walled hoses ■ Smooth-edged bandsteel design prevents damage to hoses





**Pinch Clamp** 

316-00102

ASCOT NO.	MFG. NO.	DESCRIPTION
316-00012	PEC12	1/2" Pinch Clamp
316-00058	PEC58	5/8" Pinch Clamp
316-00078	PEC78	7/8" Pinch Clamp
316-00716	PEC716	7/16" Pinch Clamp
316-00916	PEC916	9/16" Pinch Clamp
316-02332	PEC2332	23/32" Pinch Clamp
316-00102	CSC-102	Handheld Pinch Clamp Crimper